

DESCRIPTION



Beno is a surface mounted batten that can be used for many applications as: BOH, Offices & Schools.

PHILIPS OSRAM

Driver

LUMILEDS

LED Chip



Illumination Data

Color temperature:	3000K 4000K
Lumen output:	3570 LM 5920 LM
CRI	80
Beam angle	110° flood

Physical Specification

Material Finish	Polycarbonate
Diffuser	Opal
Optics	Clear
Ingress protection (IP)	40
Impact Protection (IK)	08

Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	21 Watt 37 Watt
P.F	>0.9
LED chip	Lumileds
Driver	Philips Osram

Installation

Installation	Surface
Wiring	Product complete with electronic components


Luminaire Body Finish Color

White Ral 9003




Certificate & Warranty

Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Dimensions & Specs

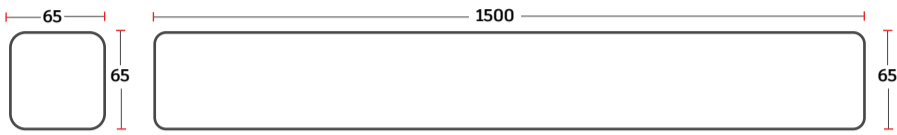

All dimensions in these sketches are in millimeters

Dimensions of luminaires

Dim	Length	Width	Height
1	1500mm	65mm	65mm


Specs

Wattage (W)	lumen (lm)
21 watt	3570lm
37 watt	5920lm

All dimensions in this schedule table are in millimeters


Product coding system

BR - BE C XX.8 XX F 40 W - X

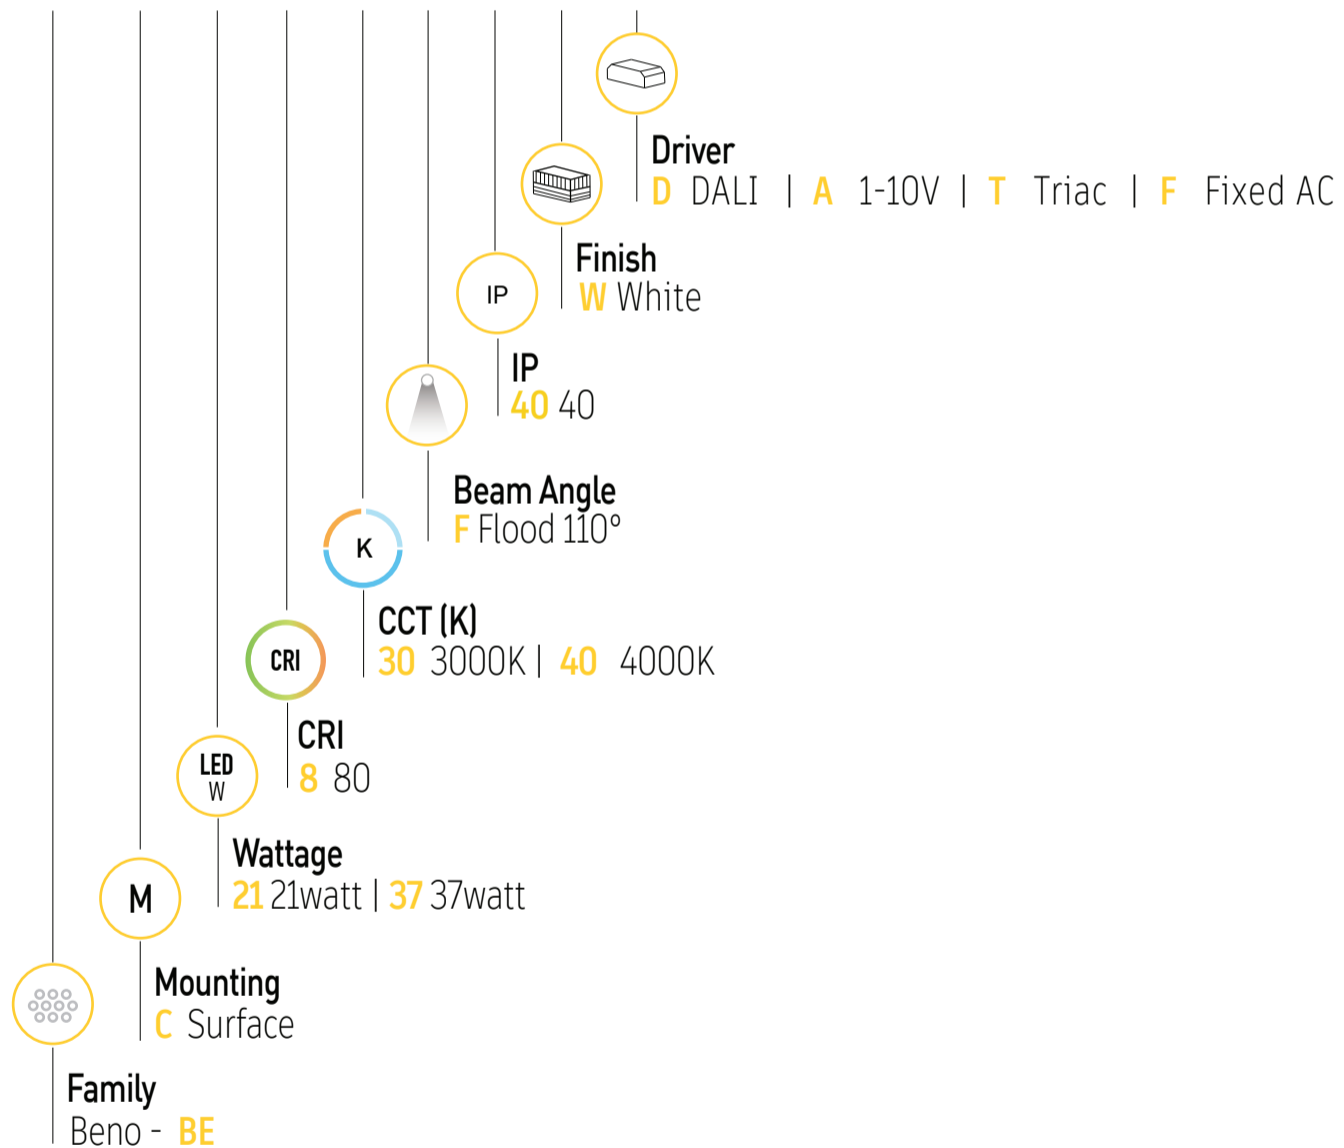

BR - BE C XX.8 XX F 40 W - X

Configure luminaire specs & send us the code for order confirmation



Beno

Batten

Optional Application



Battery



Dimmable

Brighton luminaires Map

■ Brighton Luminaires Range


■ Selected Luminaire Default placement

Indoor


Outdoor




Accessories




37 Watt 110° Beam Angle
Polar Curve

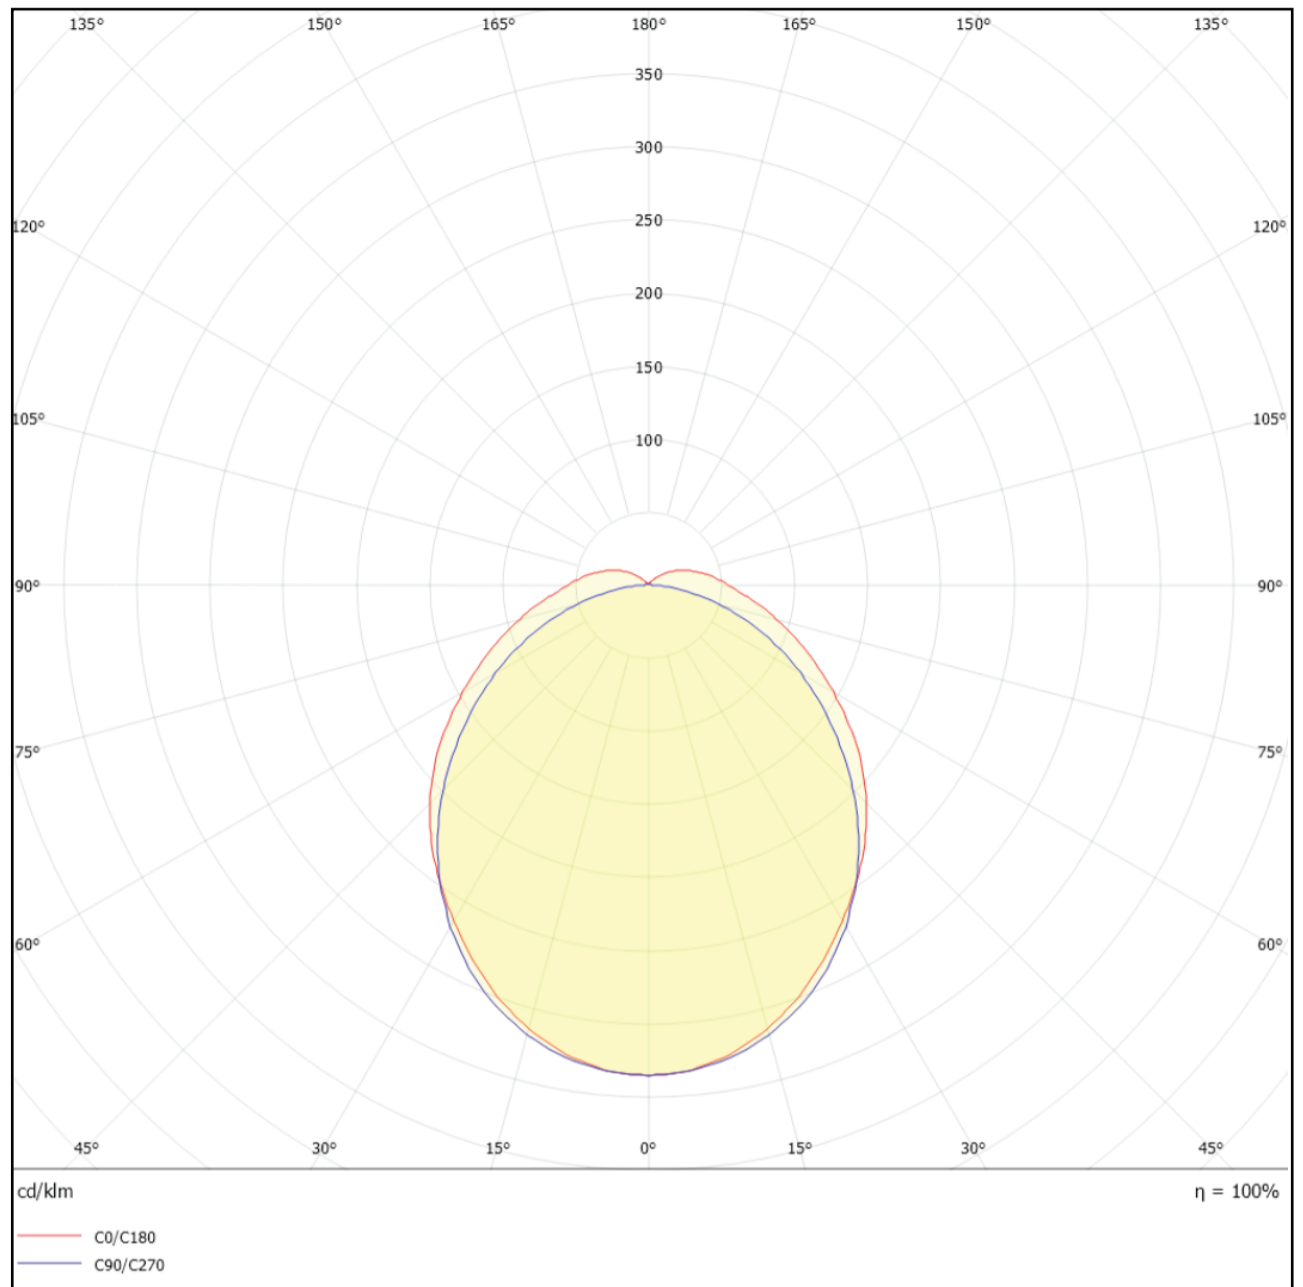

37 Watt 110° Beam Angle
Cone Diagram

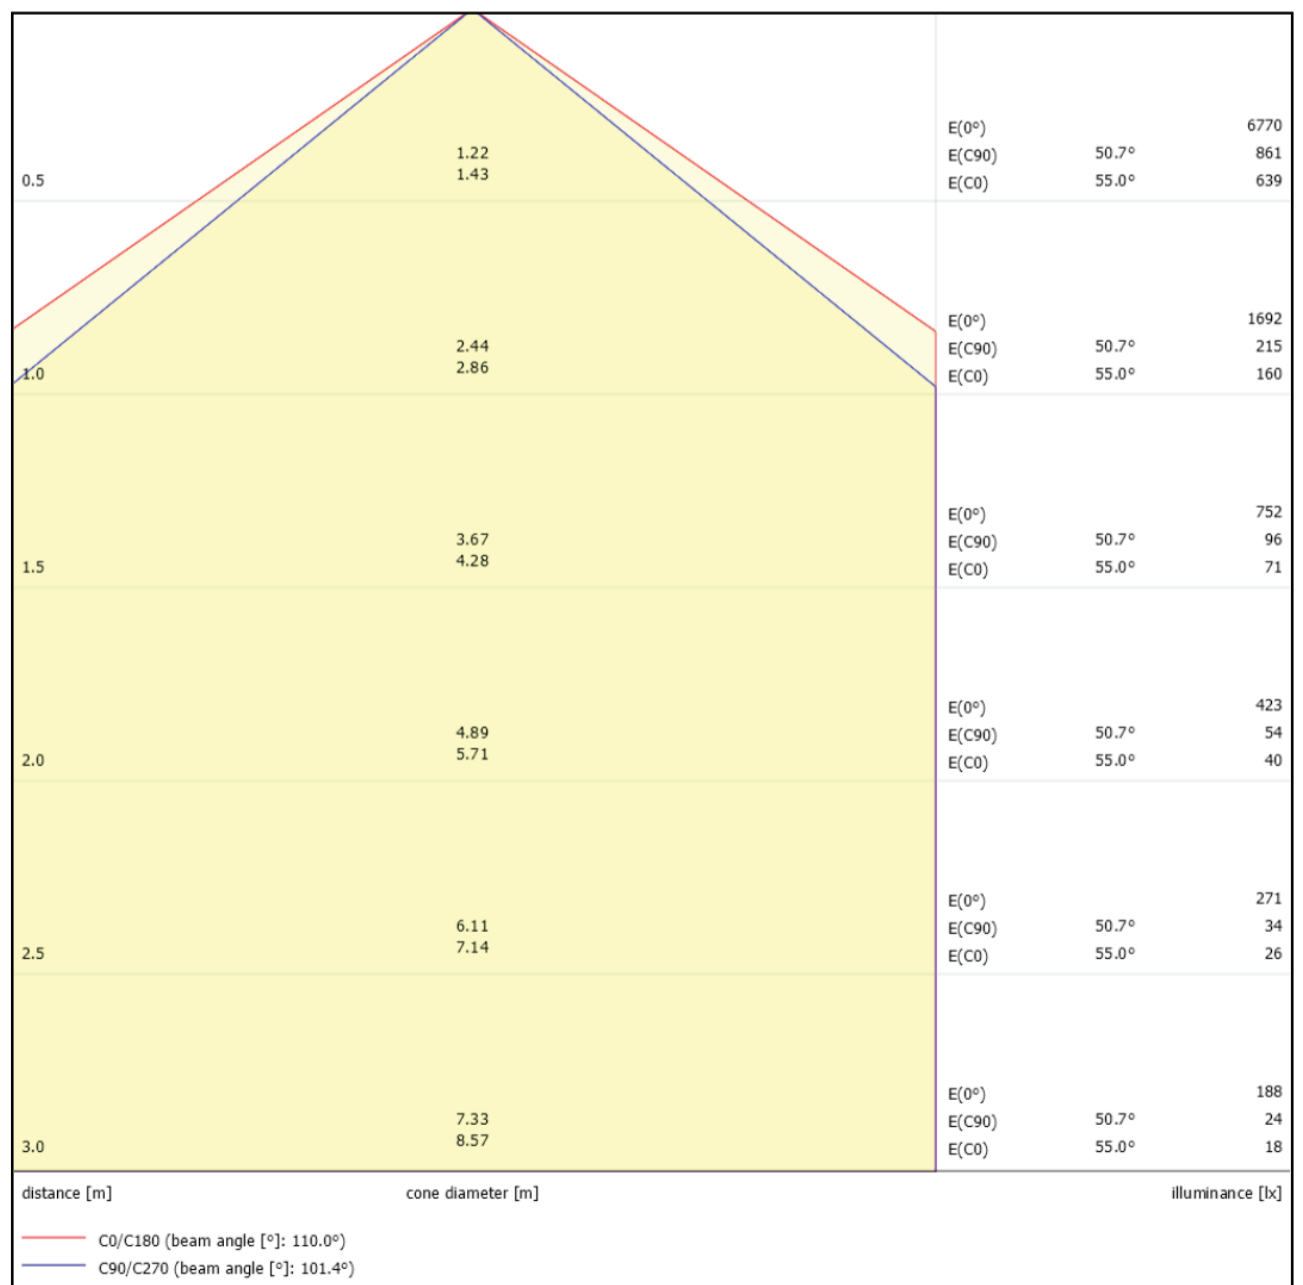



Batten BA

BRIGHTON