



DESCRIPTION

Suitable for a wide range of applications, BIANCO is backlit, edgelit & reduced-glare luminaire delivering uniform and controlled light. With its PMMA diffuser, can provide totally innovative way to light up spaces. it is ideal for general areas whilst maintaining a family visual throughout the building.





LED Chip



Illumination Data

Color temprature:	3000K 4000K 5000K 6500K
Lumen output:	4000 LM
CRI	80 90
Beam angle	120° Flood
UGR	<13

Physical Specification

Material Finish	Aluminium	
Diffuser	Poly carbonate	
Optics	PMMA LENS	
Ingress protection (IP)	40 54 65	
Impact Protection (IK)	02	

Electric Characteristics

Light source	LED Built in	
LED type	SMD	
Power	40 Watt	
P.F	>0.9	
LED chip	Lumileds Samsung	
Driver	Philips	

Installation

Installation	Ceiling Recessed Suspended
	Surface mounted
Wiring	Product complete with
	electronic components

Luminaire body Finish Color

White Ral 9003



Certificate & Warranty

Certification

CB | CE | LM79 | LM80

TM21 | Photo biological


Lifetime expectancy
Warranty duration

50.000 hrs

5 years



Dimensions & Specs



Dimnesions of luminaires


Dim	Α	В	С
1	595mm	595mm	30mm
2	1195mm	295mm	30mm

All dimensions in this schedule table are in milimeters

Specs

Dimesnion (mm)	Wattage (W)	lumen (lm)
Dim1	40 watt	4000lm
Dim2	40 watt	4000lm

Product coding system

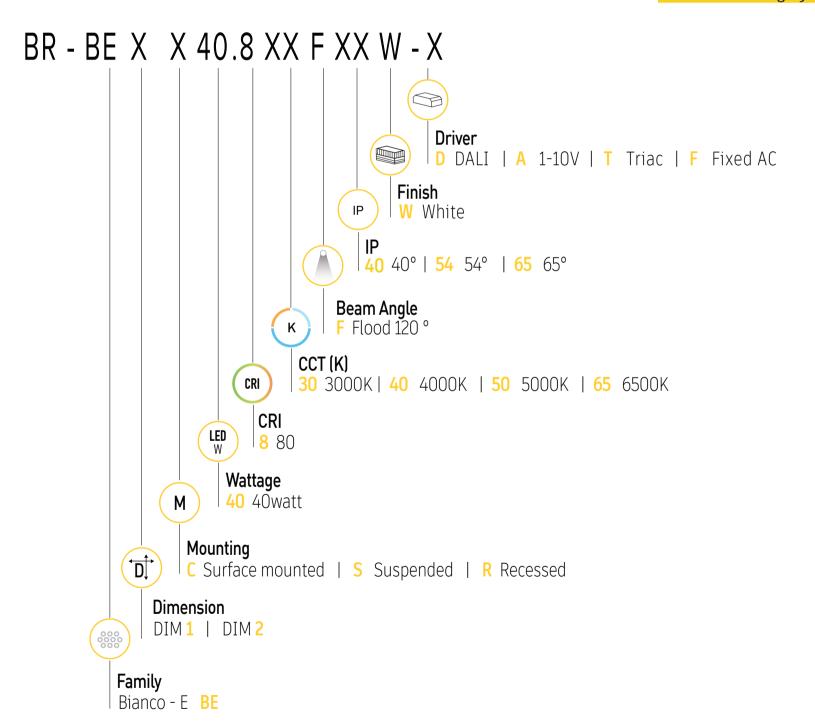

BR - BE X X 40.8 XX F XX W - X

Configure luminaire specs & send us the code for order confirmation



Optional Application








Suspended

Surface mounted


Dimmable

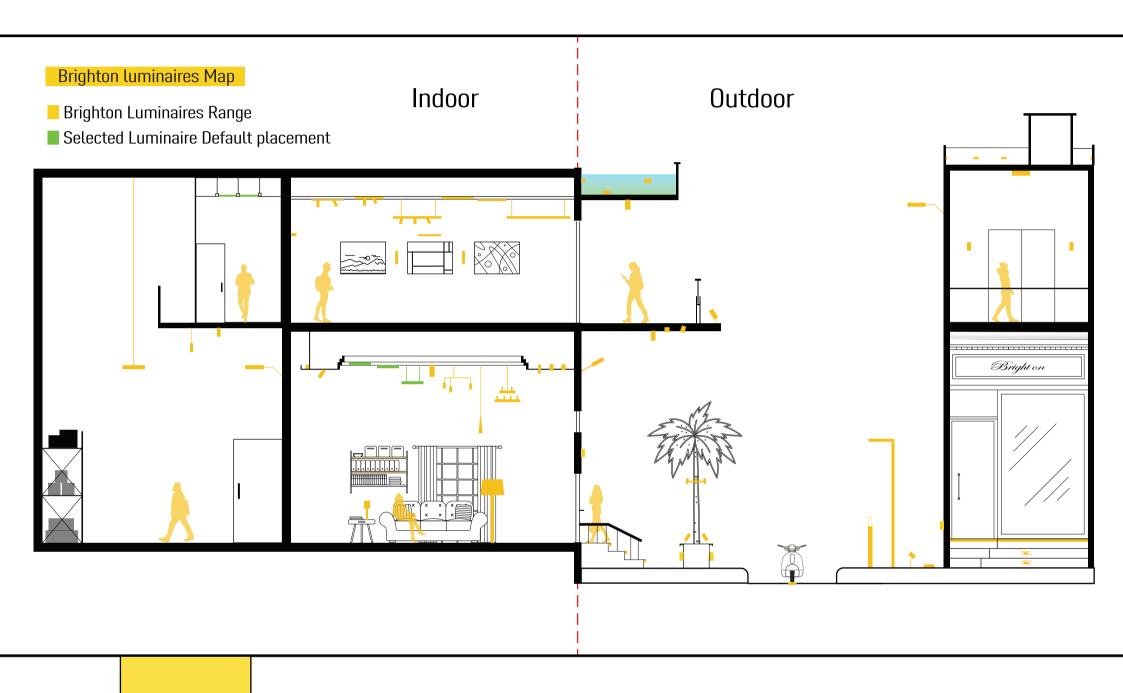

Accessories



01. Suspension Kit







02. Surface Kit



DIM 1 Polar Curve

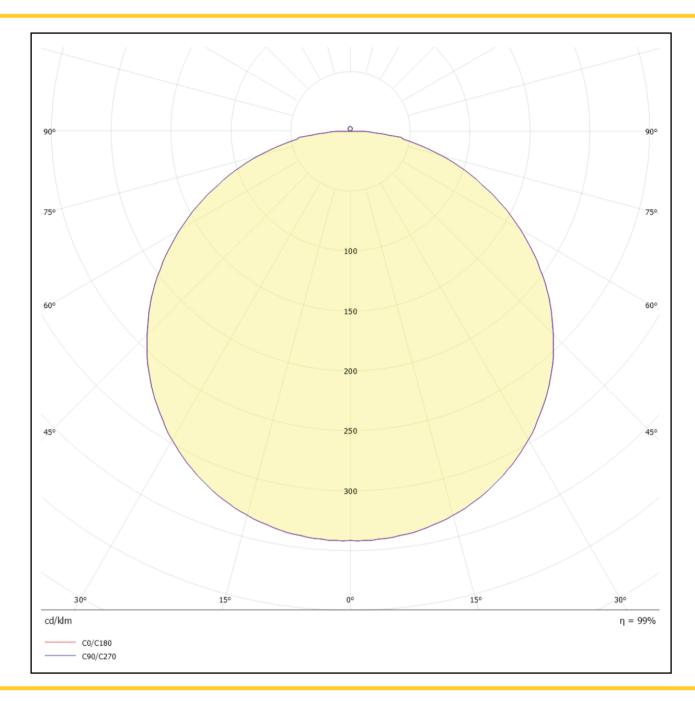


DIM 1 Cone Diagram

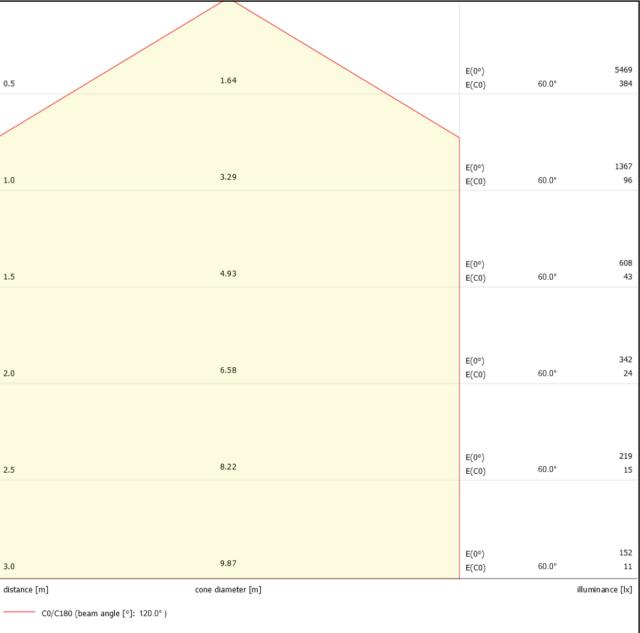



DIM 2 Polar Curve

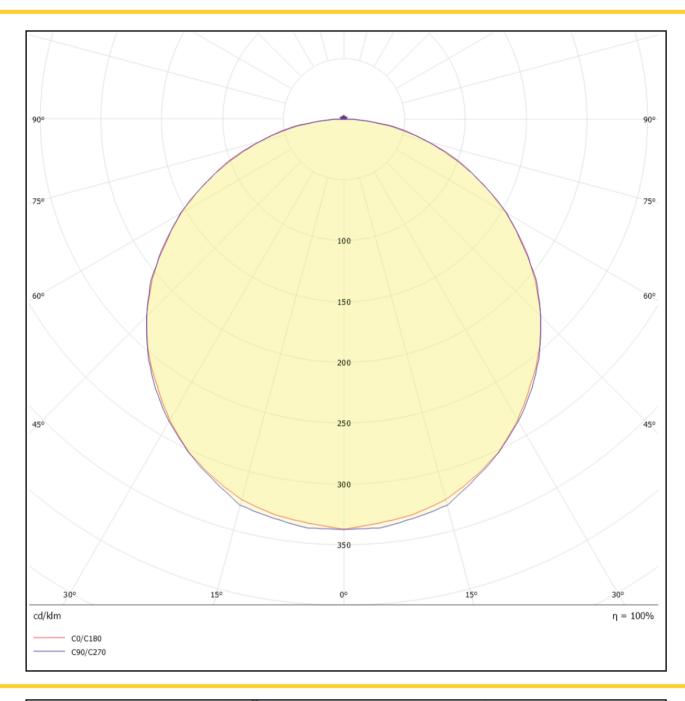

DIM 2 Cone Diagram

