




Era

Exit Sign

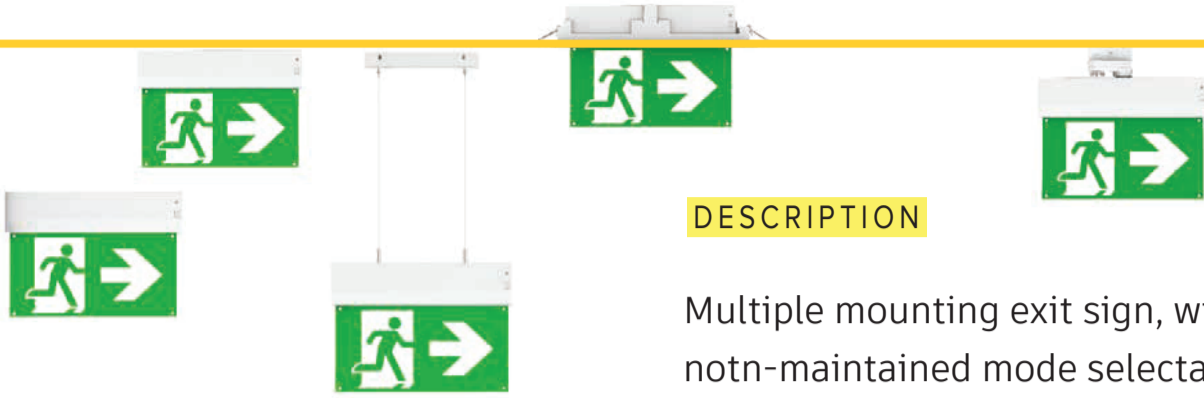

DESCRIPTION

Multiple mounting exit sign, with IP20, notn-maintained mode selectable. different mounting types, suitable for any space.



LED Chip



Illumination Data

Color temprature:	5000K
Viewing distance:	25m 30m
CRI	70

Physical Specification

Material Finish	Polycarbonate
Diffuser	Polycarbonate
Pictogram	Left, Right, Up & Down
Ingress protection (IP)	20

Electric Characteristics

Light source	LED Built in
LED Type	SMD
Main power	3 Watt
Emergency power	1 Watt
Emergency duration	3 hour
LED chip	Lumileds
Battery	NI-cd LiFePO4

Installation

Installation	Surface Recessed Suspended Wall Mounted Track
Wiring	Product complete with electronic components

Luminaire Body Finish Color


White Ral 9003	
Black Ral 9005	

Certificate & Warranty

Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Dimensions & Specs

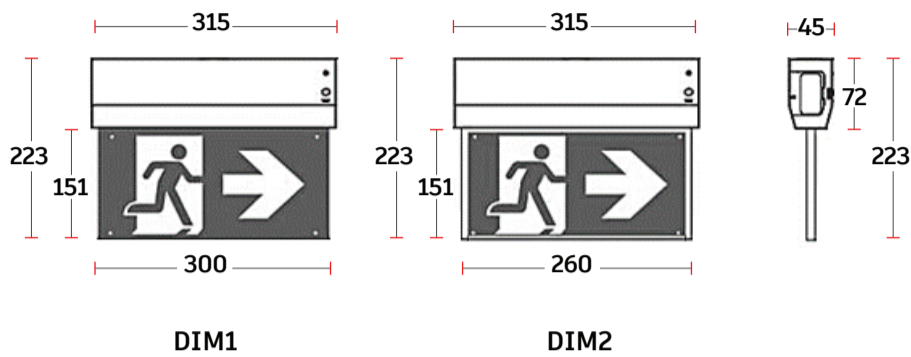

DIM1

DIM2

All dimensions in these sketches are in millimeters*


Dimensions & specs of luminaires

Dim	Length	Width	Height	Main Power	Emergency Power	Visibility
1	300mm	45mm	115mm	3 watt	1 watt	25 meter
2	260mm	45mm	115mm	3 watt	1 watt	30 meter

All dimensions in this schedule table are in millimeters

Product coding system

BR - ER X X 3.7 50 3 20 X-X

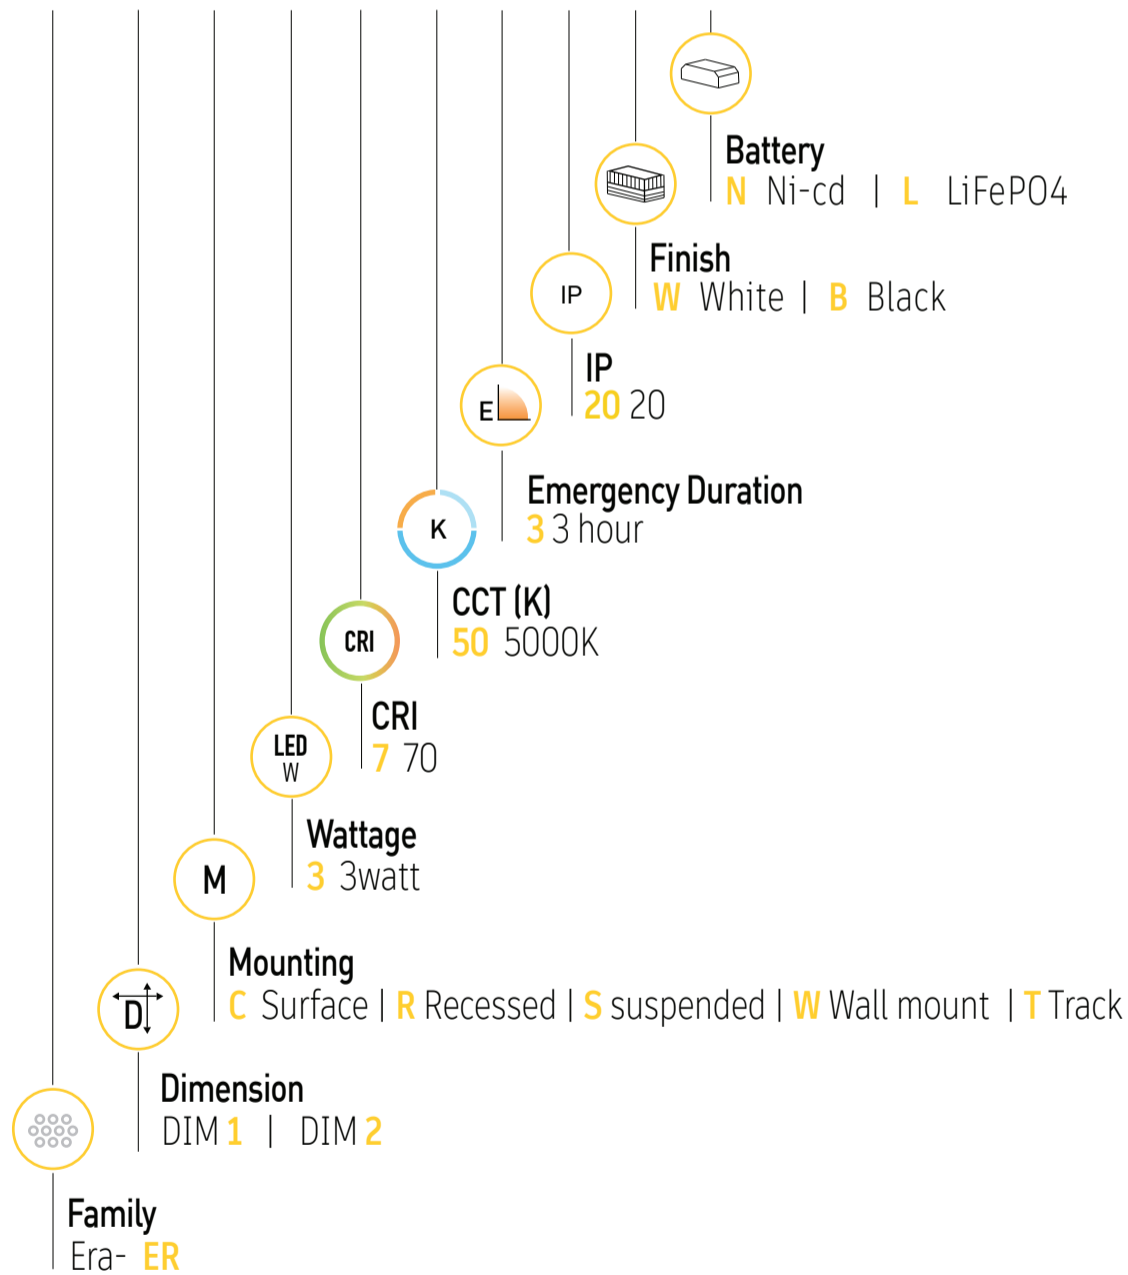

BR - ER X X3.7 50 3 20 X - X

Configure luminaire specs & send us the code for order confirmation



Optional Application



Battery



Dimmable


Brighton luminaires Map

Brighton Luminaires Range

Selected Luminaire Default placement

Indoor

Outdoor

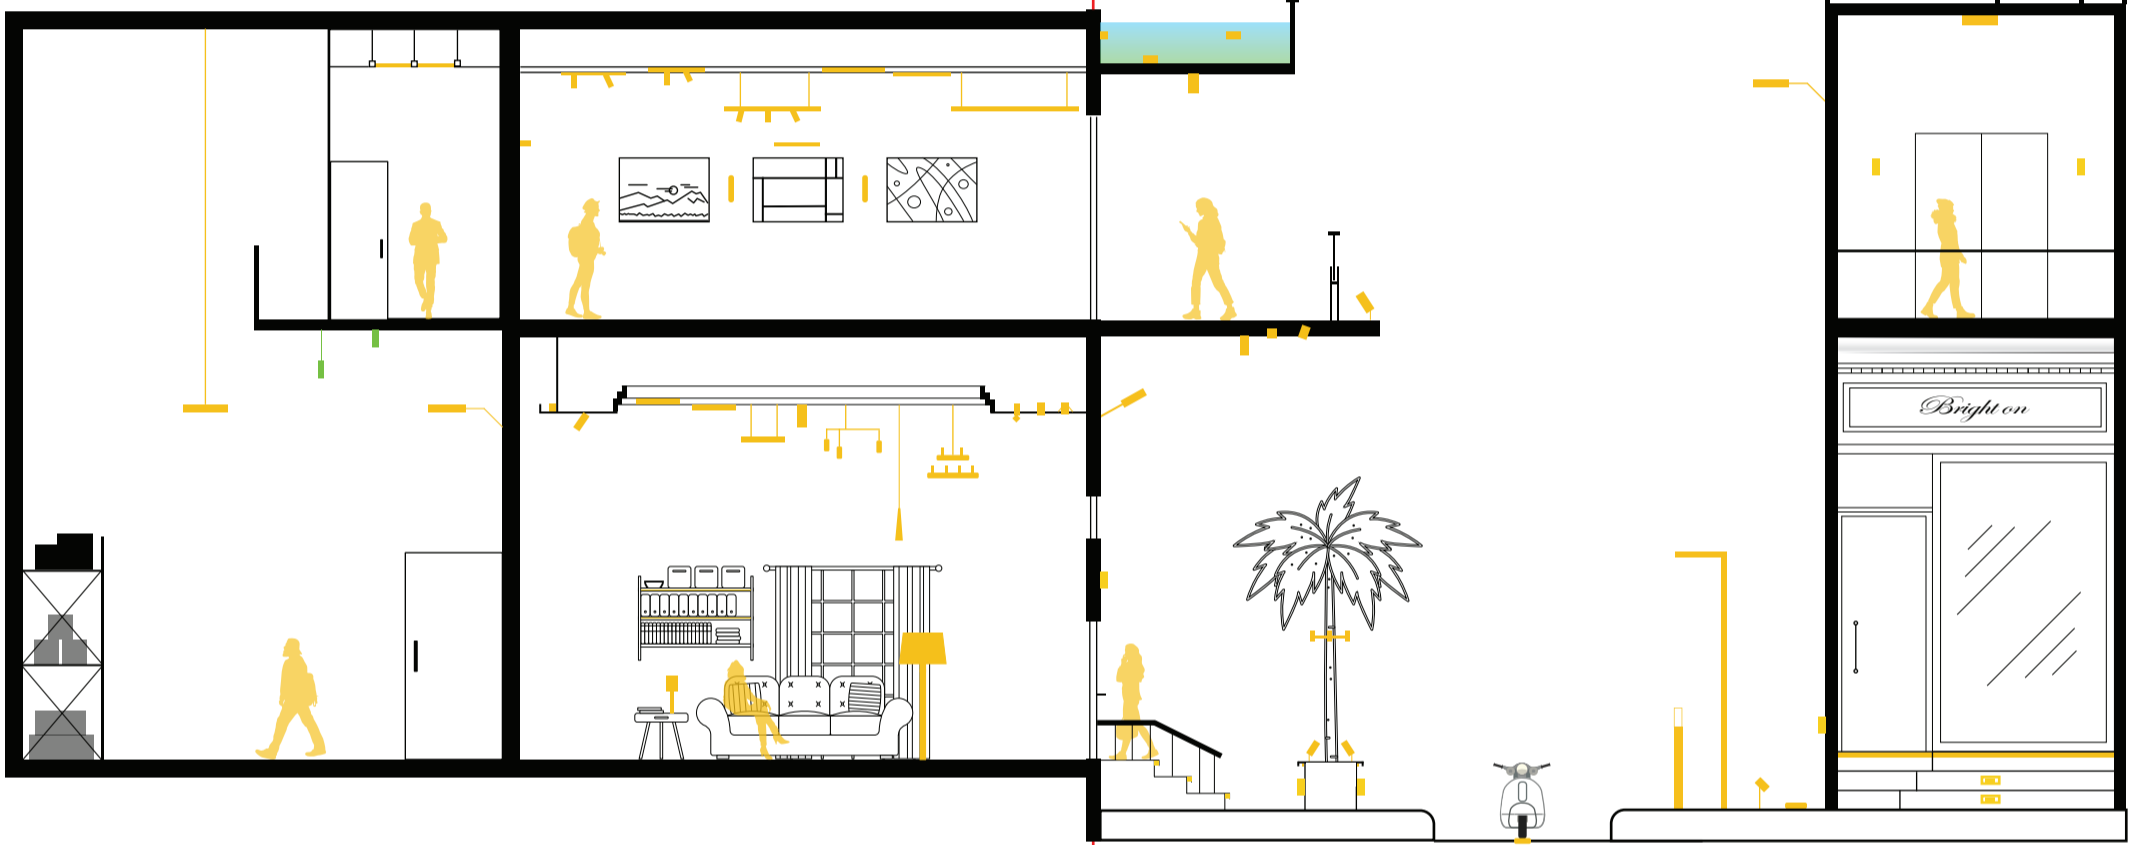

Accessories



* Product contains four pictograms *

01. Four Pictograms
(Up, Down, Left and Right)

Era ER

BRIGHTON

