

DESCRIPTION

Eta just like the classic lanterns, can be placed directly on the ground or fixed to a wall by its bracket. It is available in medium & large sizes in order to be able to create an incorporeal volume, made up only of light.

PHILIPS

Driver

LUMILEDS

LED Chip



Illumination Data

| | |
|---------------------------|-----------------|
| Color temperature: | 3000K 4000K |
| Lumen output: | 600 LM 1500LM |
| CRI | 80 |
| Beam angle | 114° Flood |

Physical Specification

| | |
|--------------------------------|--------------------|
| Material Finish | Die cast aluminium |
| Diffuser | None |
| Optics | None |
| Ingress protection (IP) | 65 |
| Impact Protection (IK) | 08 |

Electric Characteristics

| | |
|---------------------|------------------|
| Light source | LED Built in |
| LED type | SMD |
| Power | 9 Watt 15 Watt |
| P.F | >0.9 |
| LED chip | Lumileds |
| Driver | Philips |

Installation


| | |
|---------------------|---|
| Installation | Surface Wall Mounted |
| Wiring | Product complete with electronic components |

Luminaire Body Finish Color


| | |
|-----------------------|--|
| White Ral 9003 | |
| Grey Ral 9006 | |
| Black Ral 9005 | |

Certificate & Warranty

| | |
|----------------------------|--|
| Certification | CB CE LM79 LM80 TM21 Photo biological |
| Lifetime expectancy | 50.000 hrs |
| Warranty duration | Up to 5 years |



Dimensions & Specs

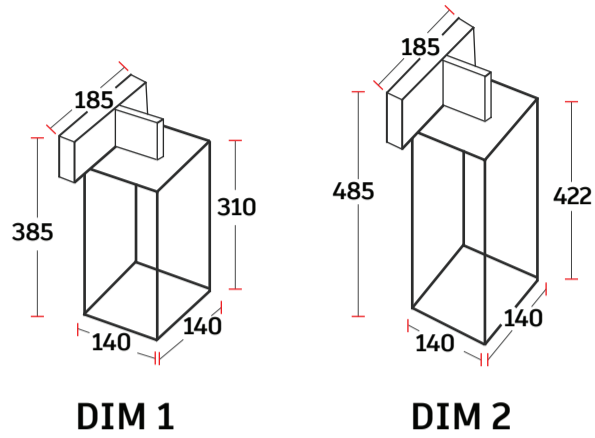

All dimensions in these sketches are in millimeters*

Dimensions & specs of luminaires

| Dim | WxL | Height |
|-----|-----------|--------|
| 1 | 140x140mm | 385mm |
| 2 | 140x140mm | 485mm |


All dimensions in this schedule table are in millimeters

Specs

| Dimension (mm) | Wattage (W) | lumen (lm) |
|----------------|-------------|------------|
| Dim1 | 9 watt | 600lm |
| Dim2 | 15 watt | 1200lm |


Product coding system

BR - ET X C XX.8 XX S 65 X - X

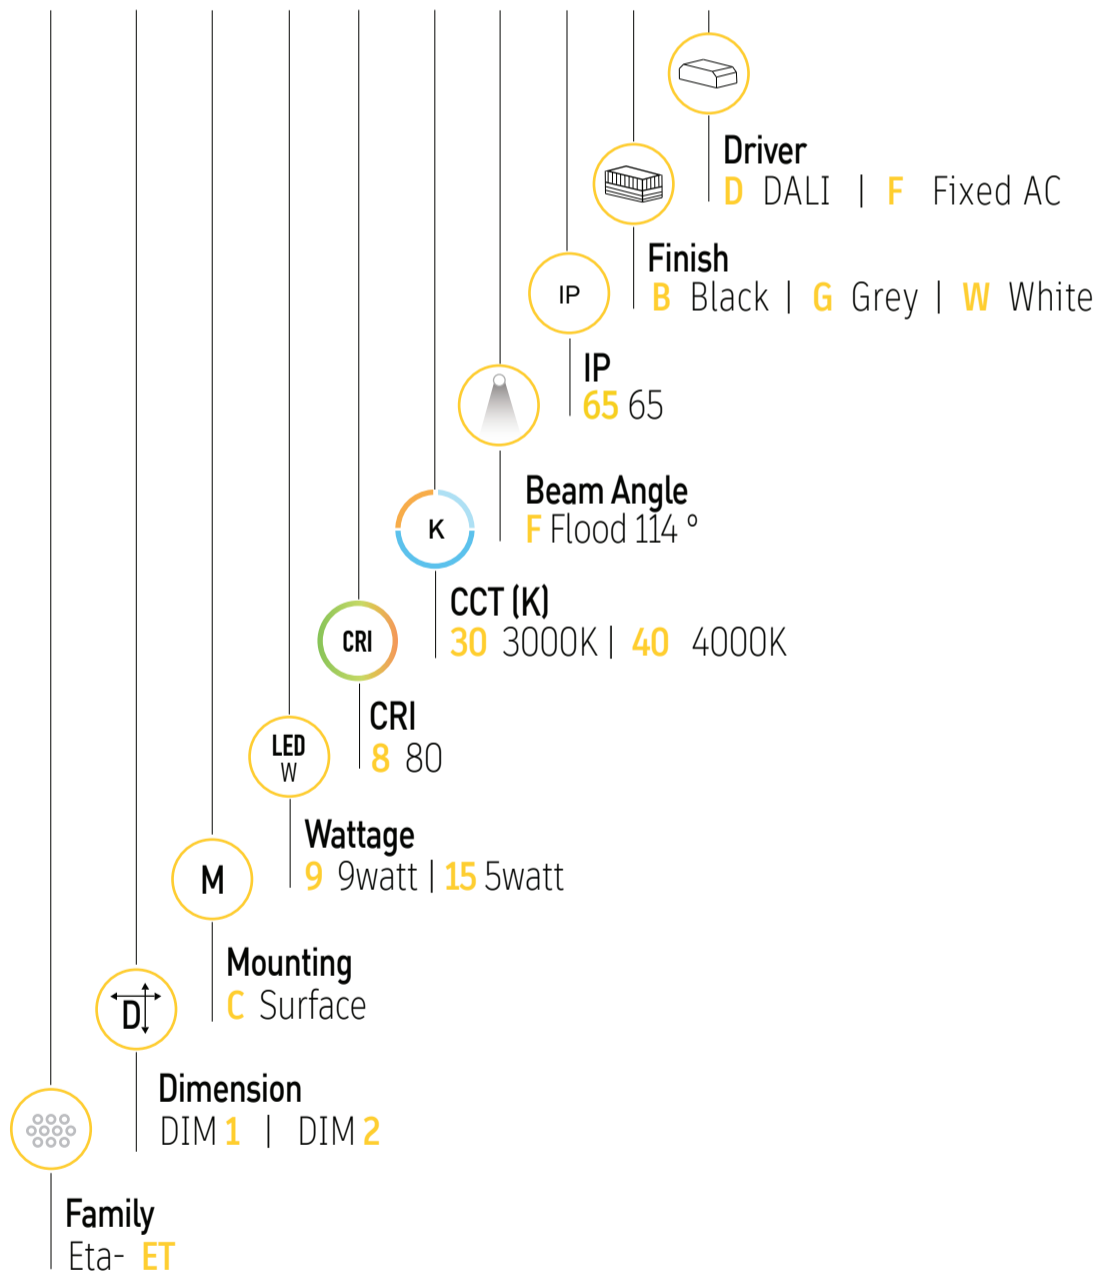

BR - ET X C XX.8 XX S 65 X - X

Configure luminaire specs & send us the code for order confirmation



Optional Application




Dimmable

Brighton luminaires Map


- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor


Outdoor

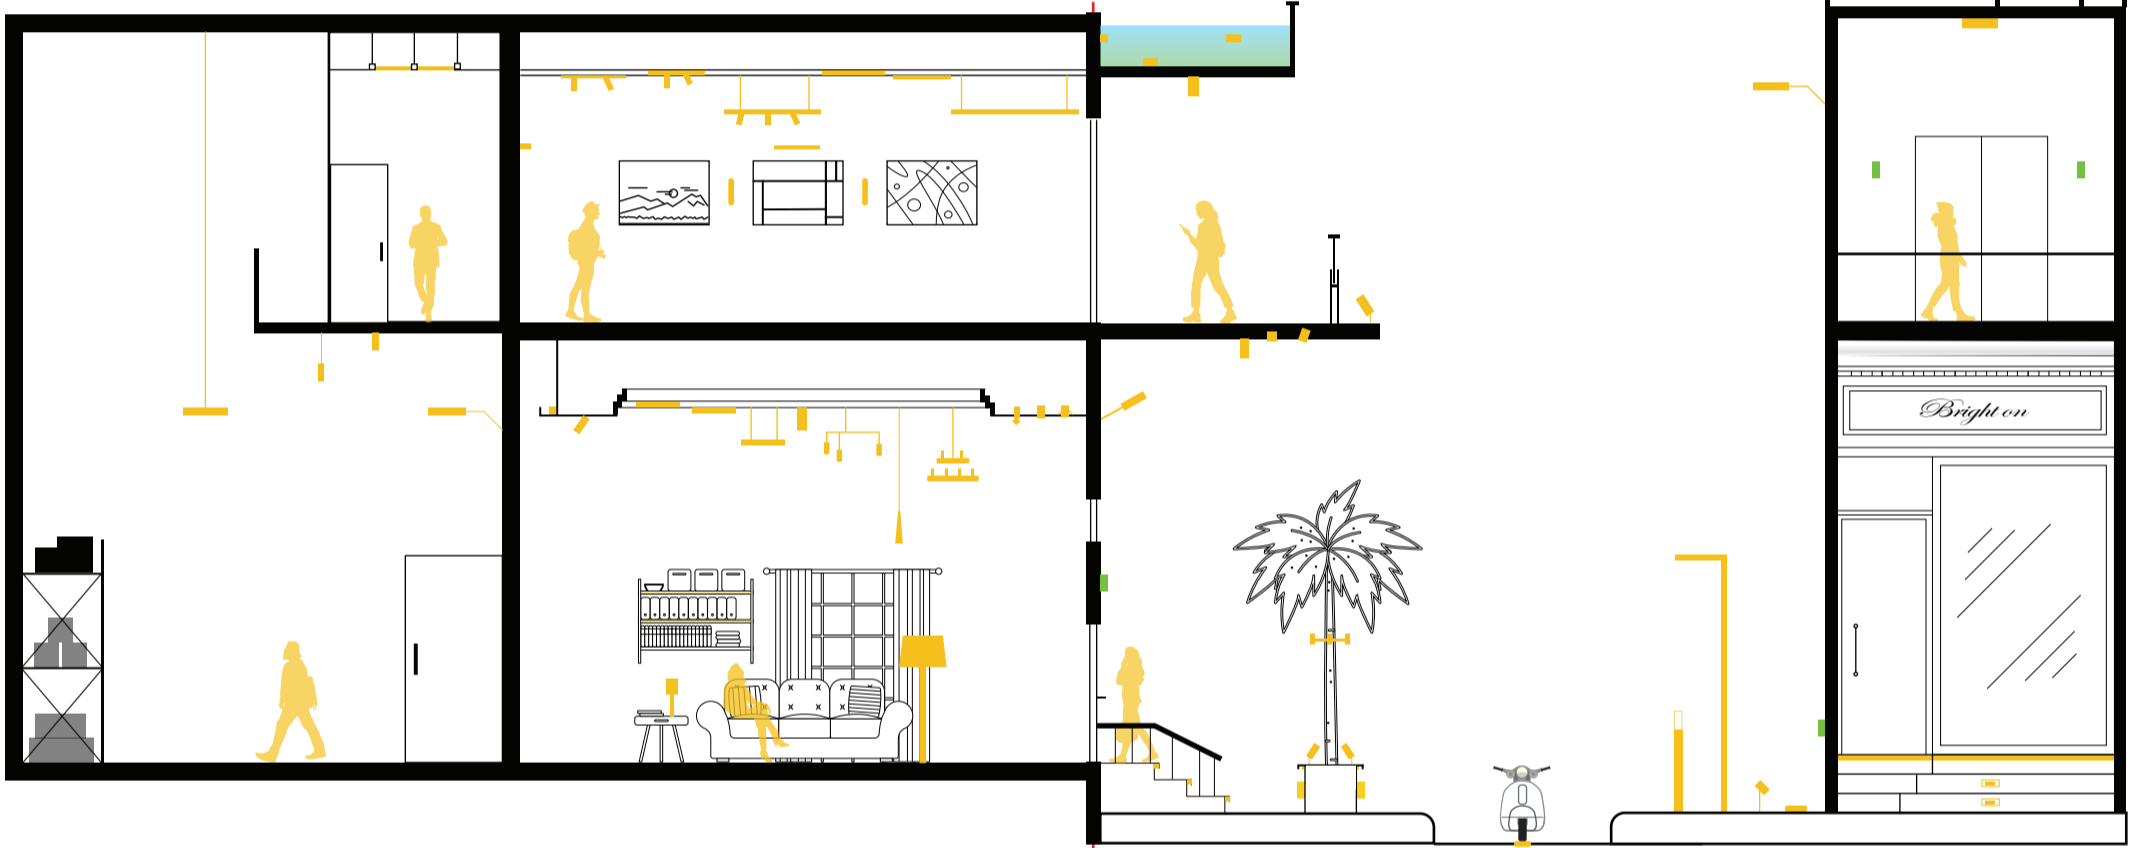


Accessories




15 Watt 114° Flood
Polar Curve

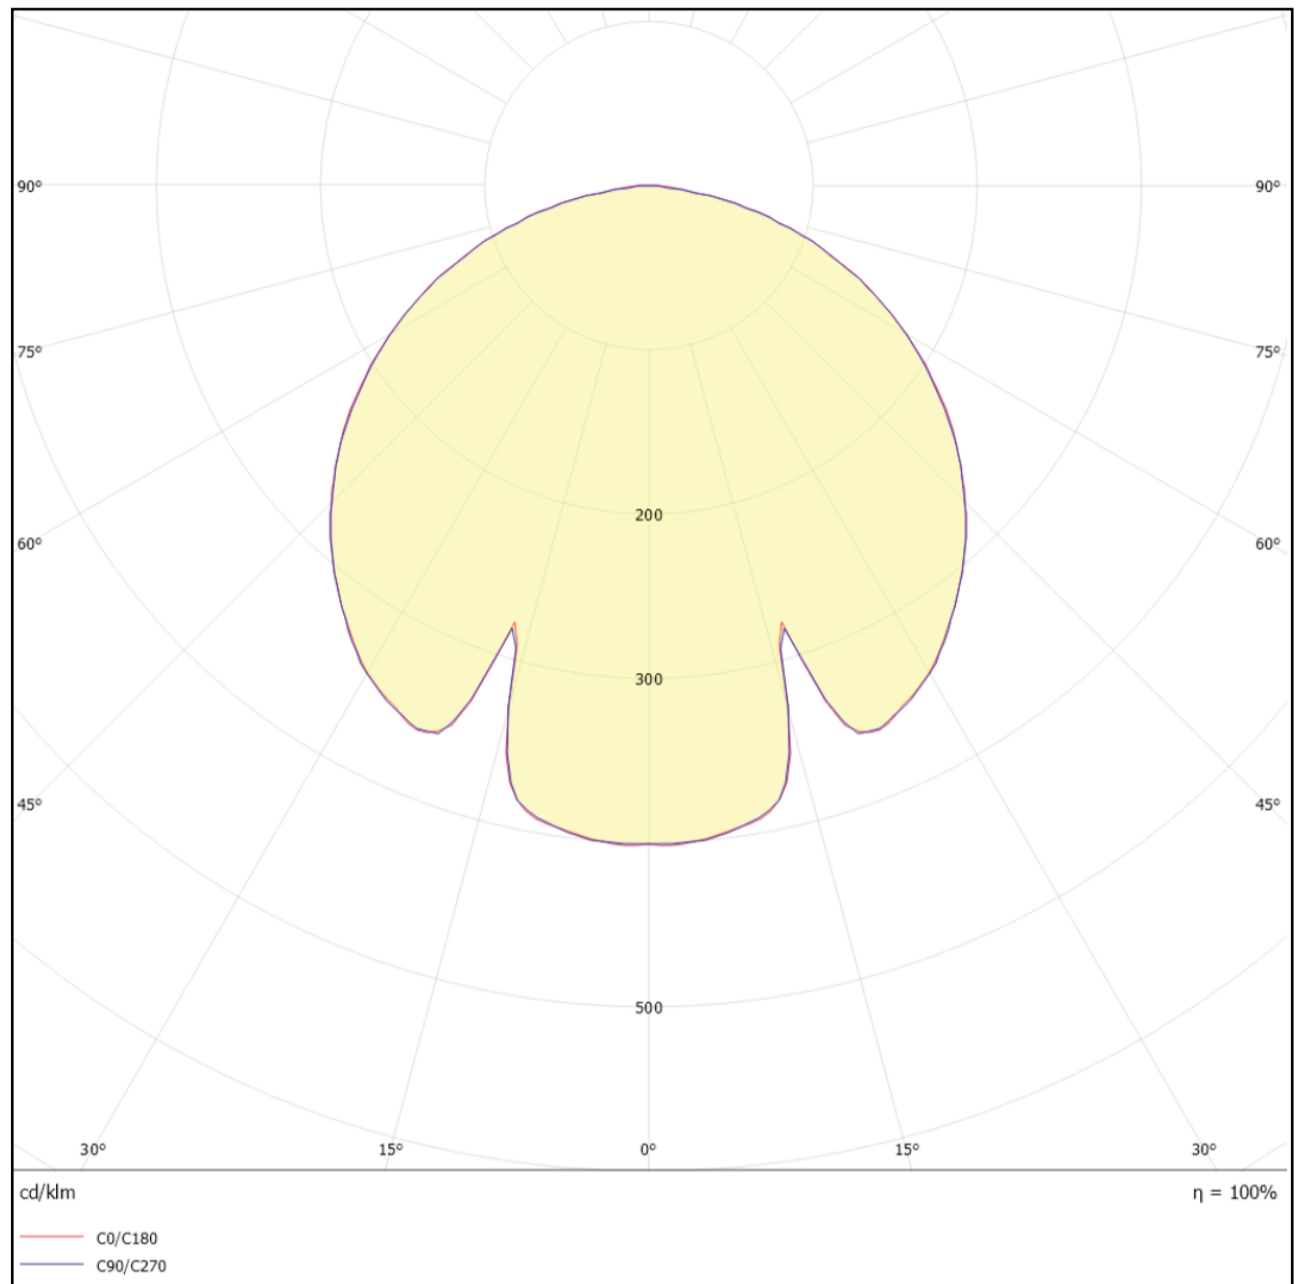

15 Watt 114° Flood
Cone Diagram

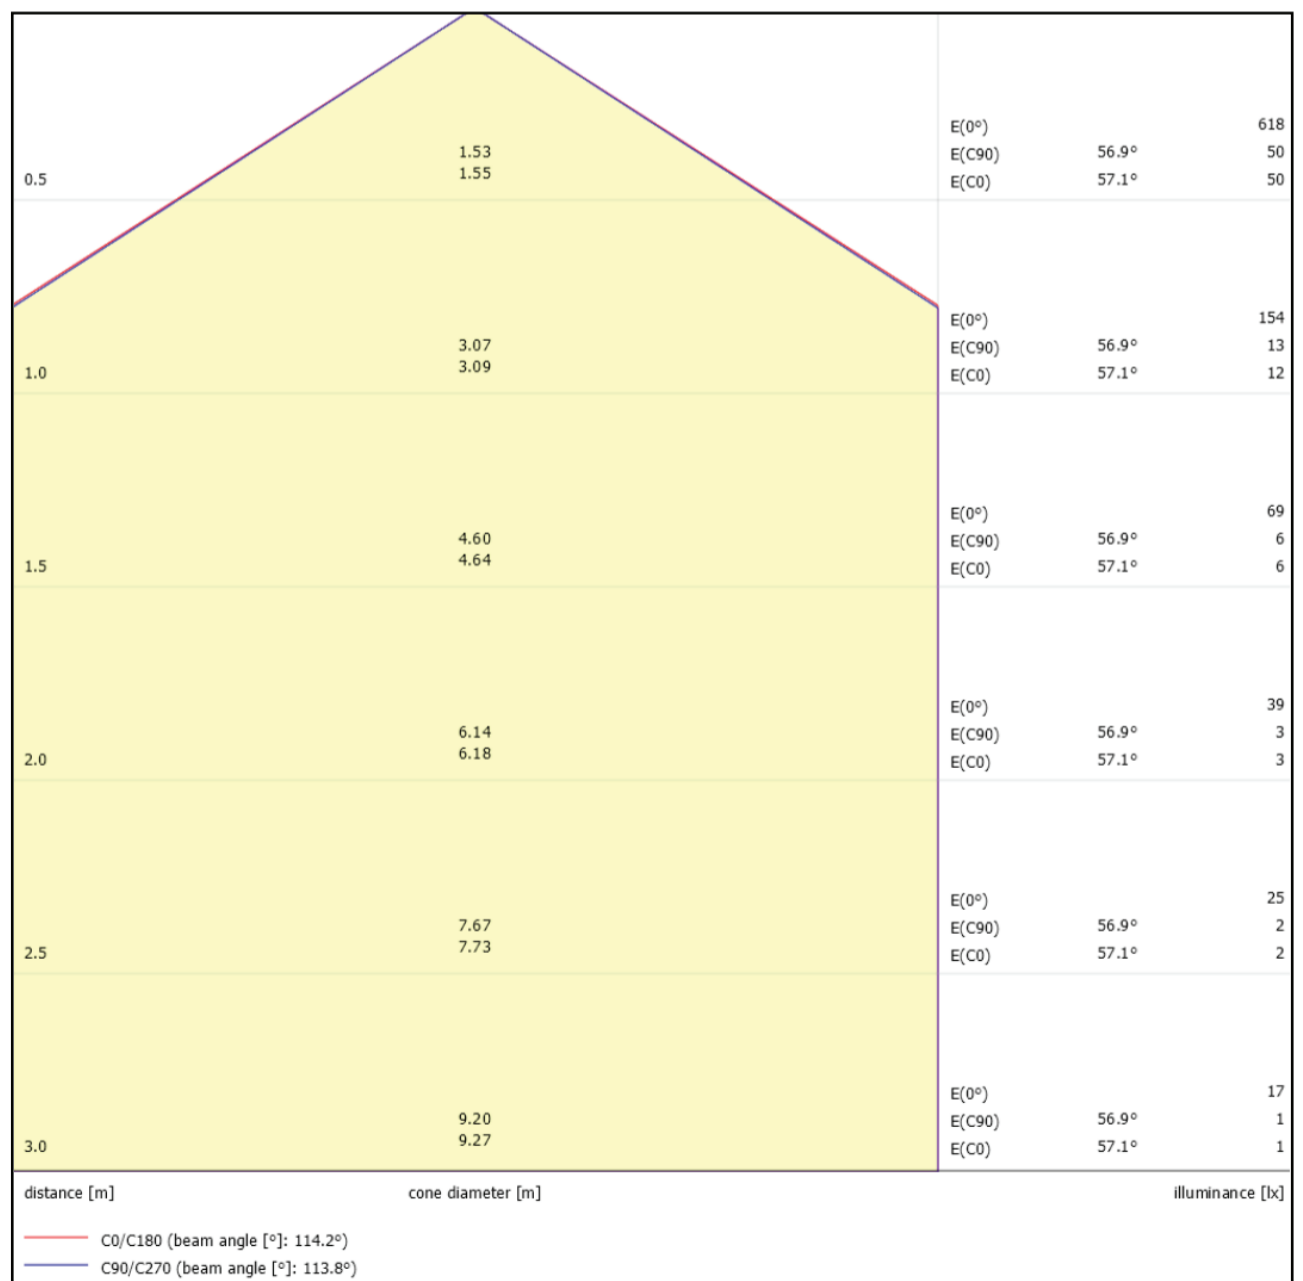

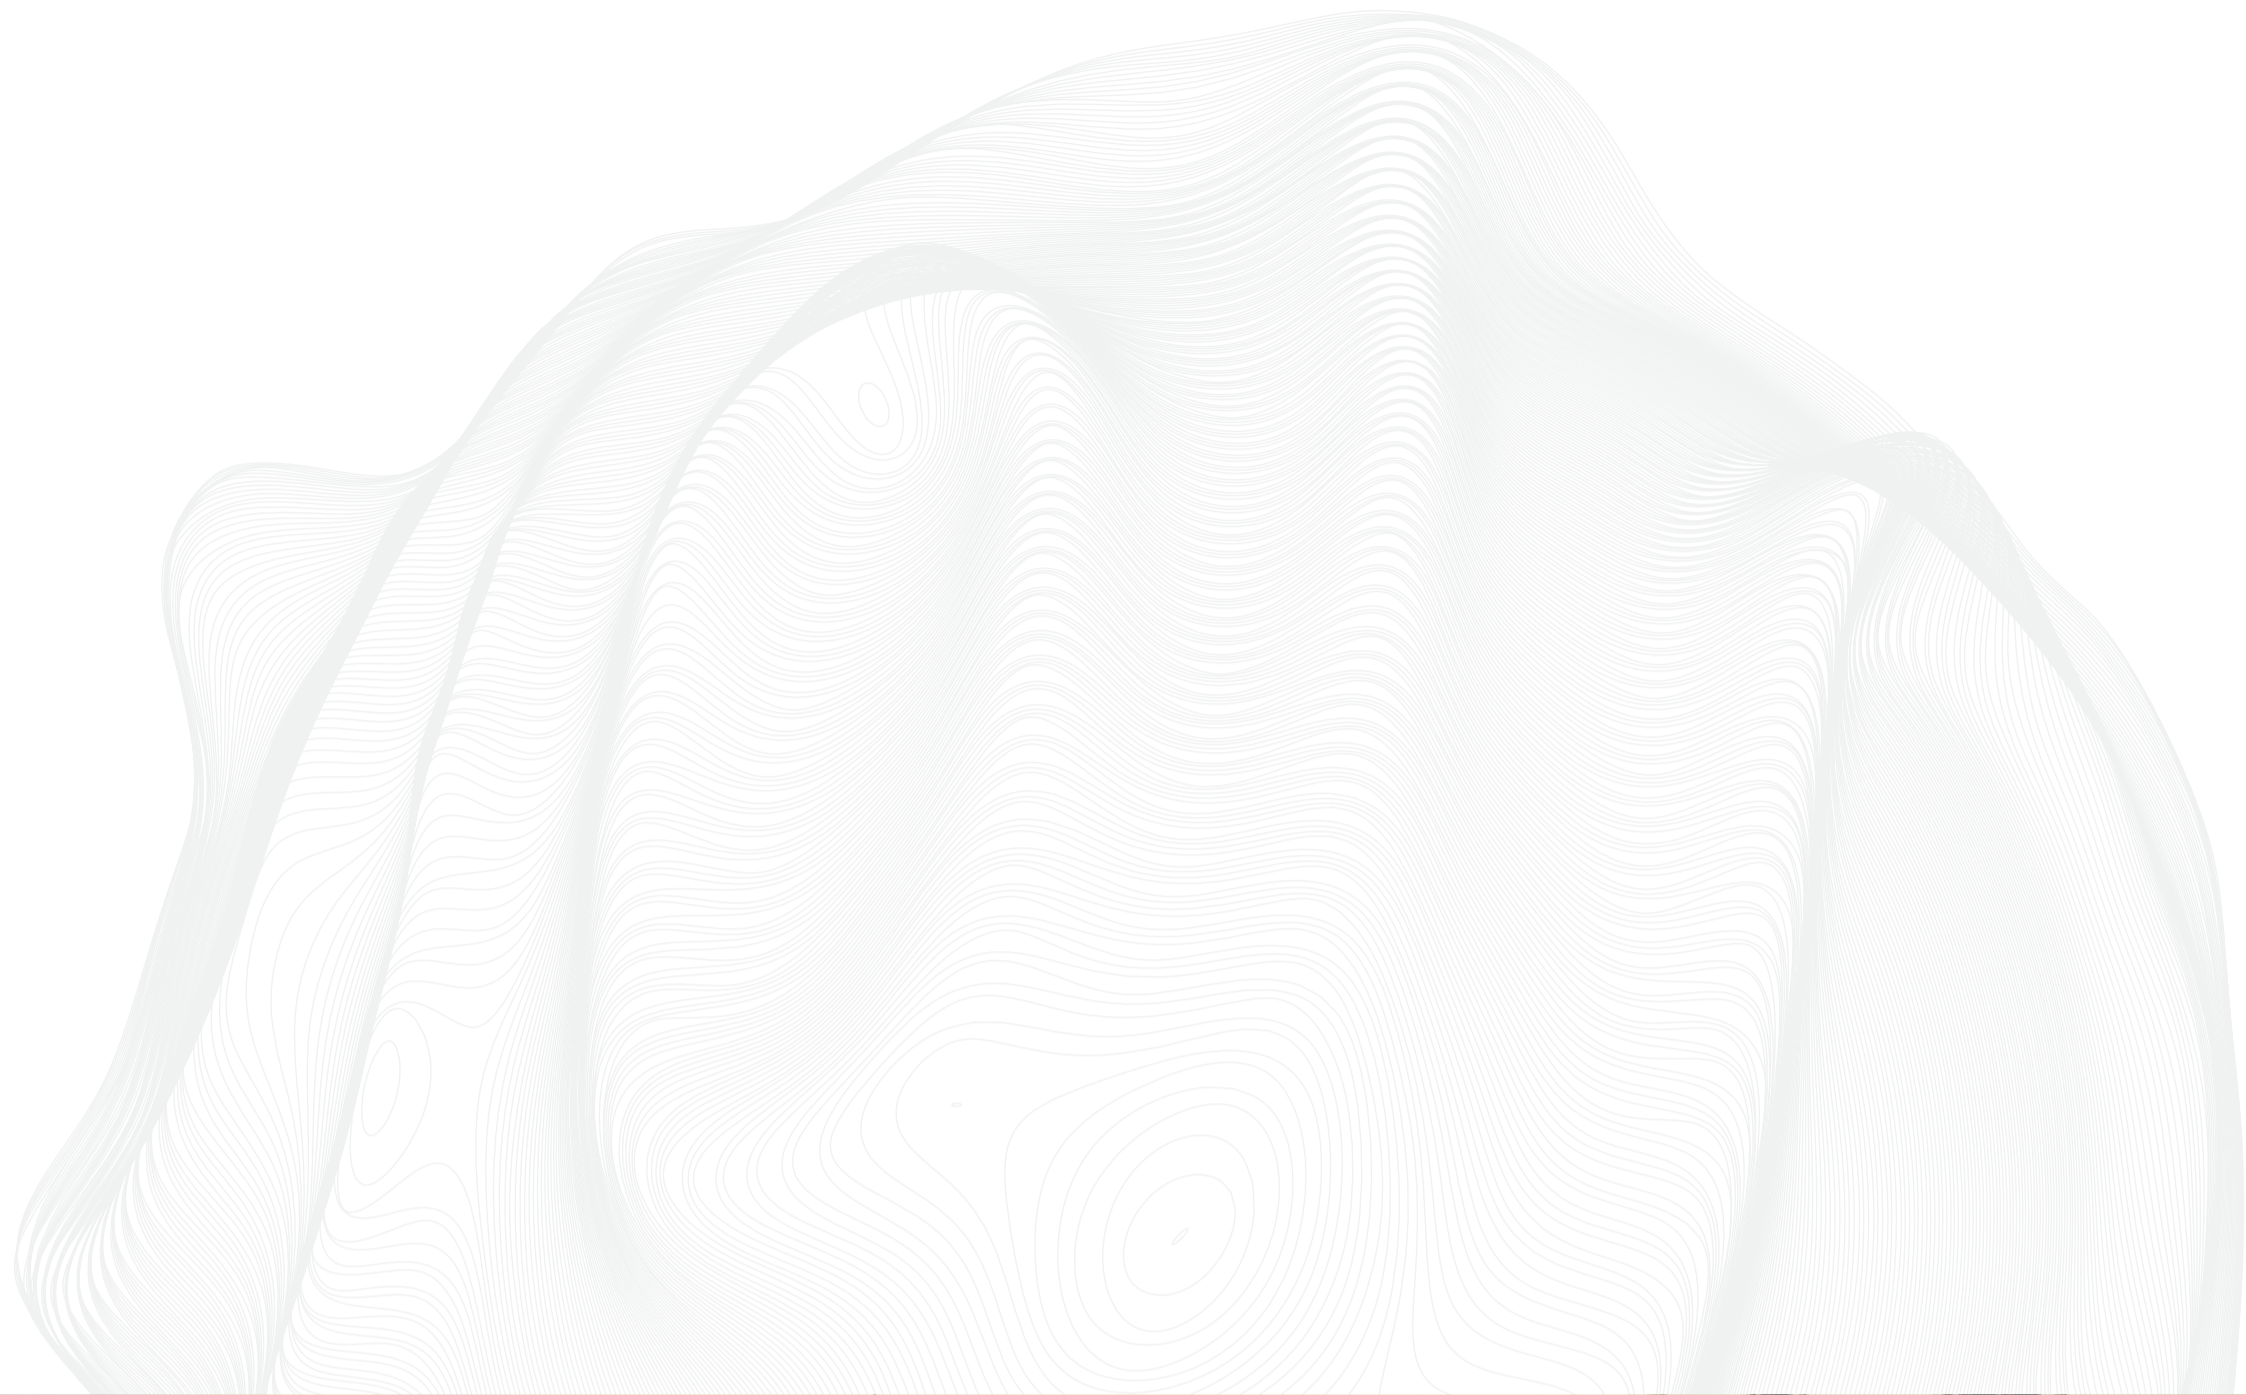

Eta ET

BRIGHTON