

# Flori

Uplight



## DESCRIPTION

Flori is uplight with a unique application versatility, providing the designer with various possible wattages & optics.

OSRAM TRIDONIC

CREE

Driver

LED Chip



### Illumination Data

Color temperature:	3000K   4000K
Lumen output:	1000 LM   1500LM   2000LM 3000 LM
CRI	80
Beam angle	15° Spot   30° Narrow   45° Medium 60° Wide

### Physical Specification

Material Finish	Die cast aluminium Stainless steel frame
Diffuser	Glass
Optics	LENS
Ingress protection (IP)	67
Impact Protection (IK)	10

### Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	10 Watt   15 Watt   20 Watt   30 Watt
P.F	>0.9
LED chip	Cree
Driver	Meanwell

### Installation

Installation	Inground recessed
Wiring	Product complete with electronic components

### Luminaire Body Finish Color

Black Ral 9005




### Certificate & Warranty

Certification	CB   CE   LM79   LM80 TM21   Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



## Dimensions & Specs

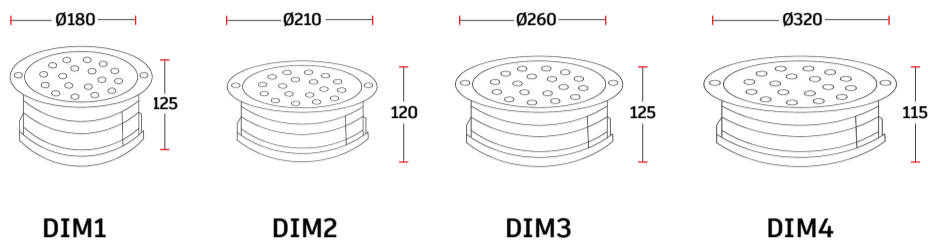

\*All dimensions in these sketches are in millimeters\*

## Dimensions of luminaires

Dim	Ø	H
1	180mm	125mm
2	210mm	120mm
3	260mm	125mm
4	320mm	115mm


## Specs

Wattage (W)	lumen (lm)
10 watt	1000lm
15 watt	1500lm
20 watt	2000lm
30 watt	3000lm

\*All dimensions in this schedule table are in millimeters\*


## Product coding system

BR - FL X R XX.8 XX X 67 B - X

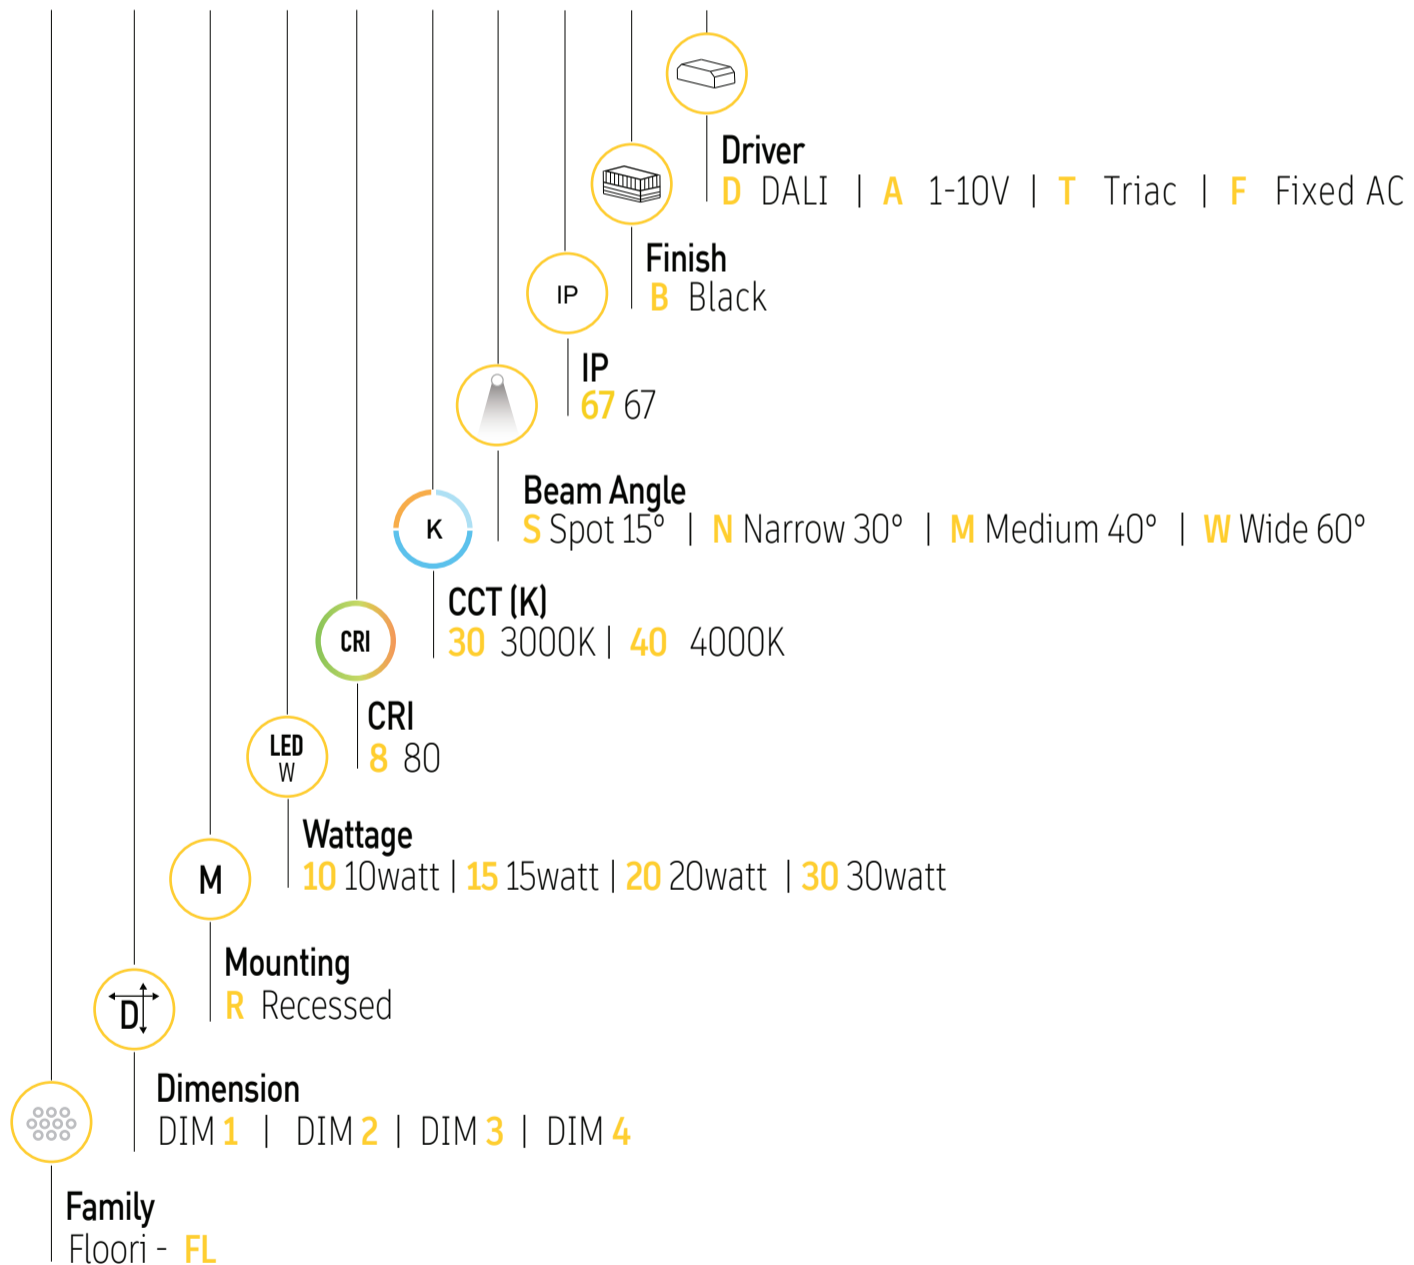

BR - FL X R XX.8 XX X 67 B - X

Configure luminaire specs & send us the code for order confirmation



## Optional Application



RGB



Dimmable


## Brighton luminaires Map

■ Brighton Luminaires Range


■ Selected Luminaire Default placement

Indoor


Outdoor

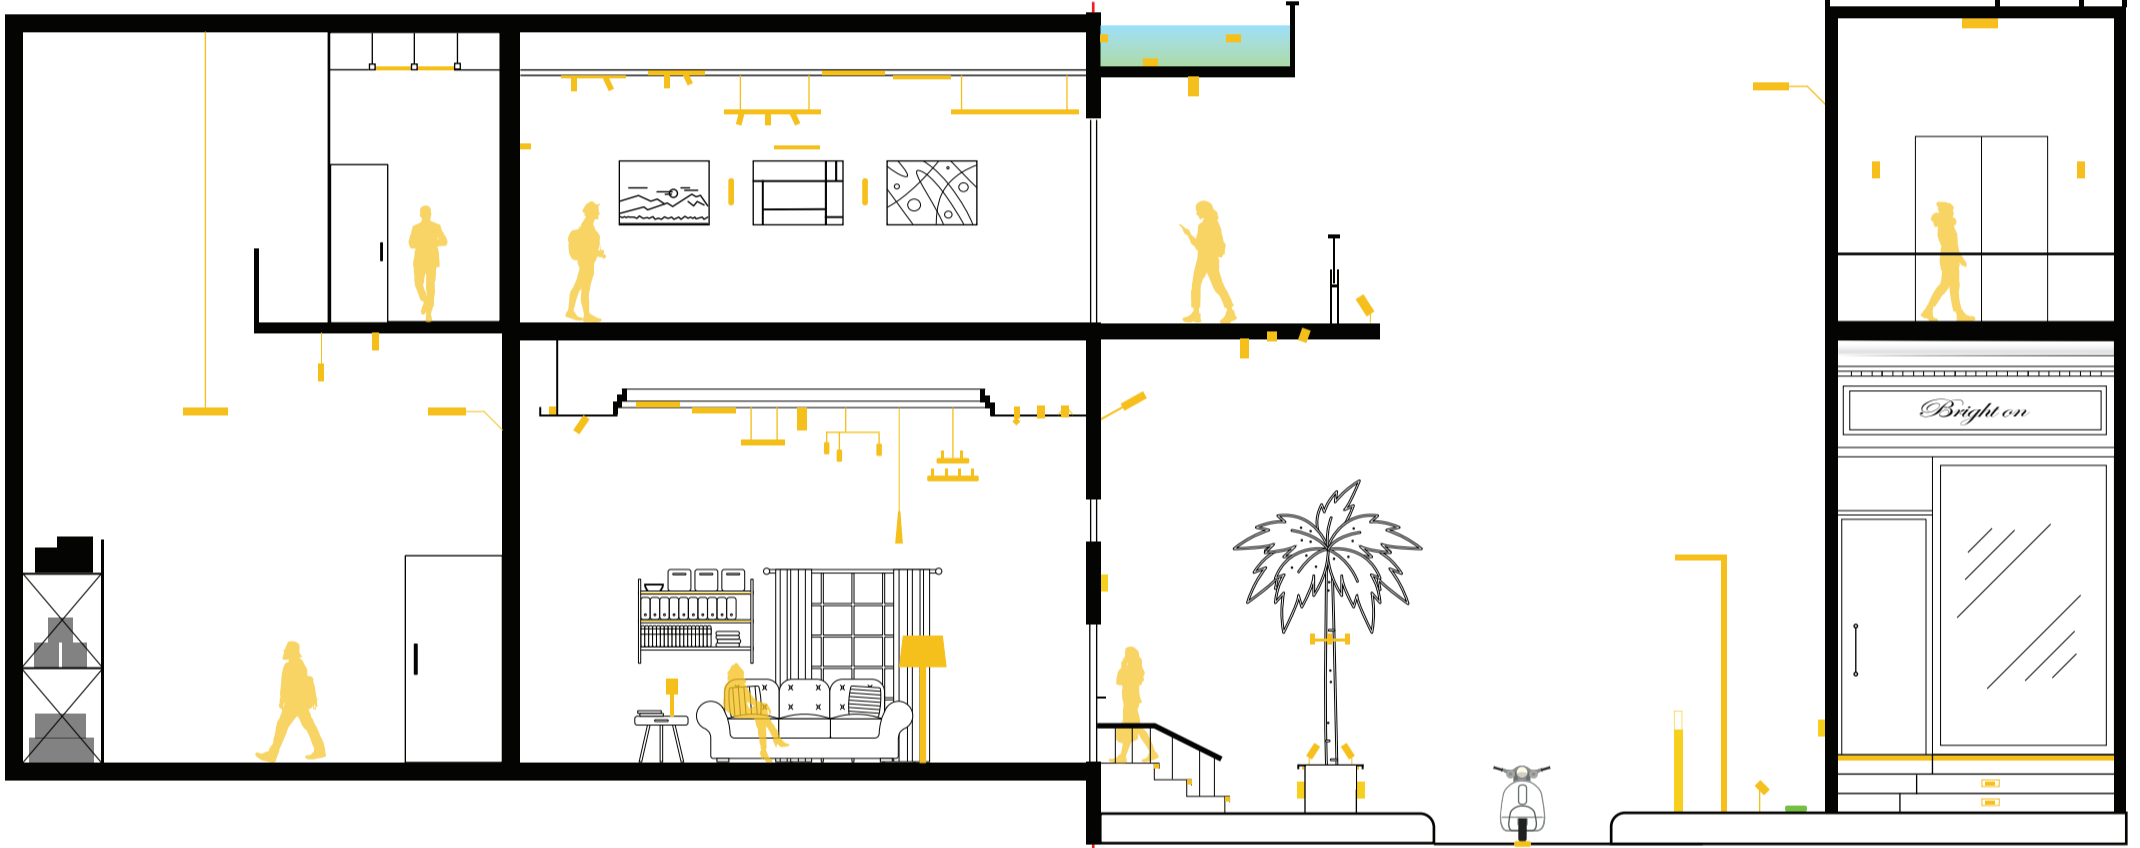


Accessories




20 Watt 15° Beam Angle  
Polar Curve

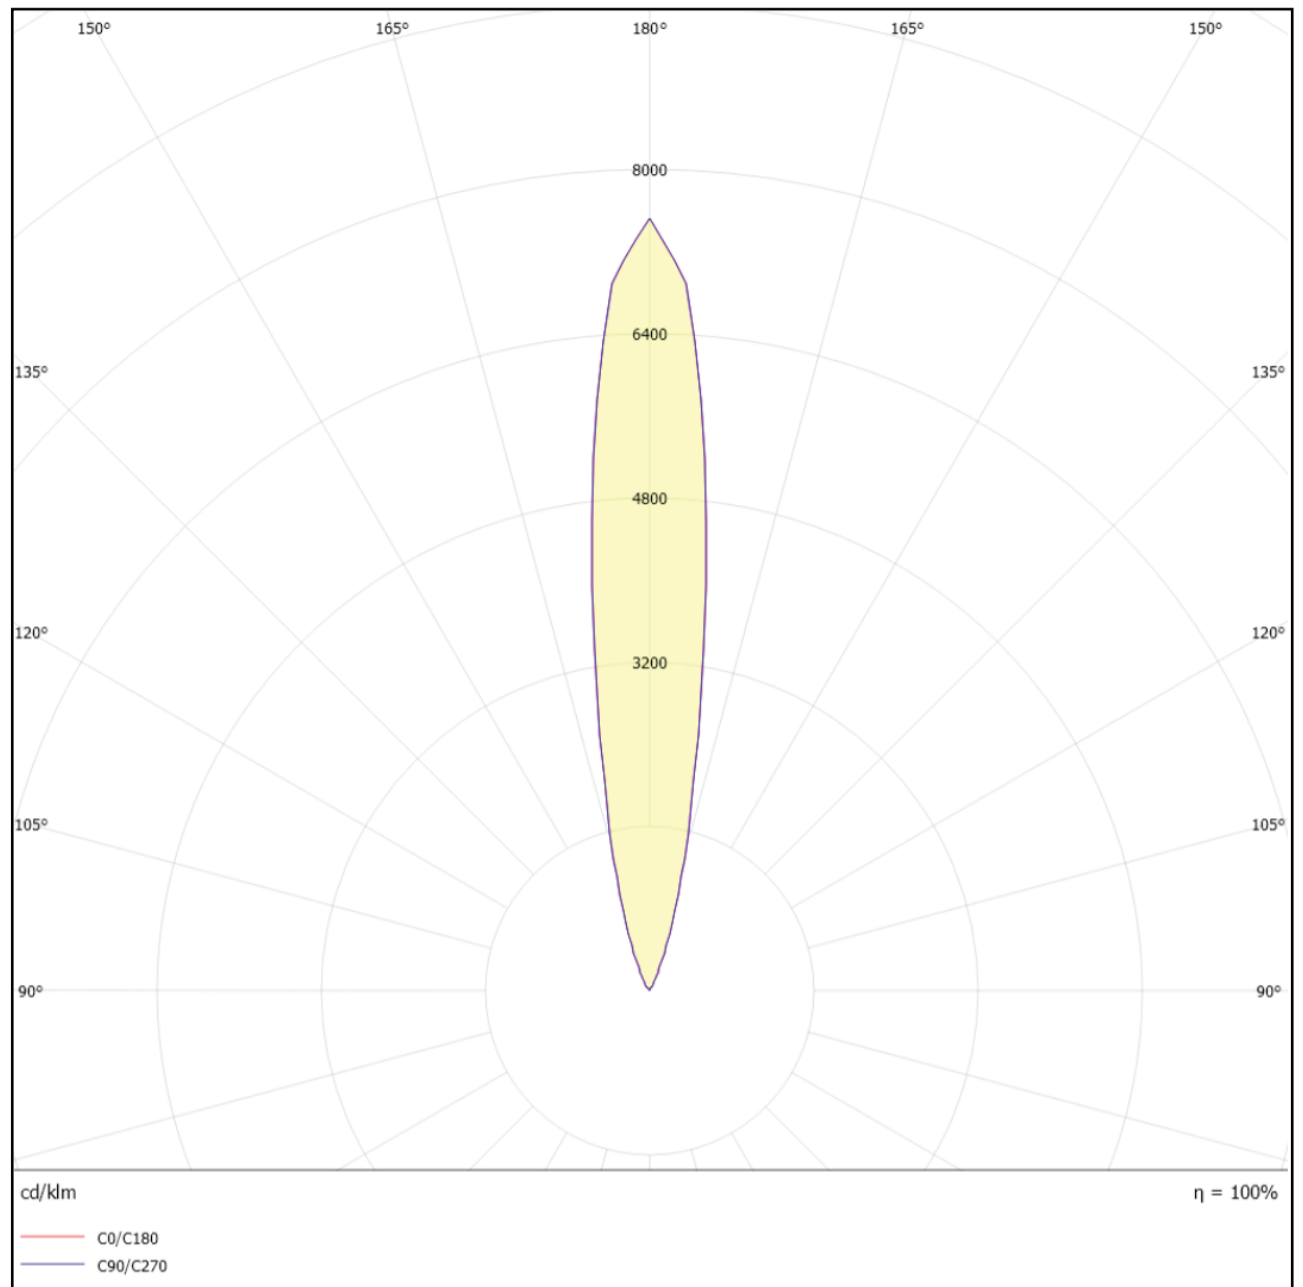


20 Watt 15° Beam Angle  
Cone Diagram

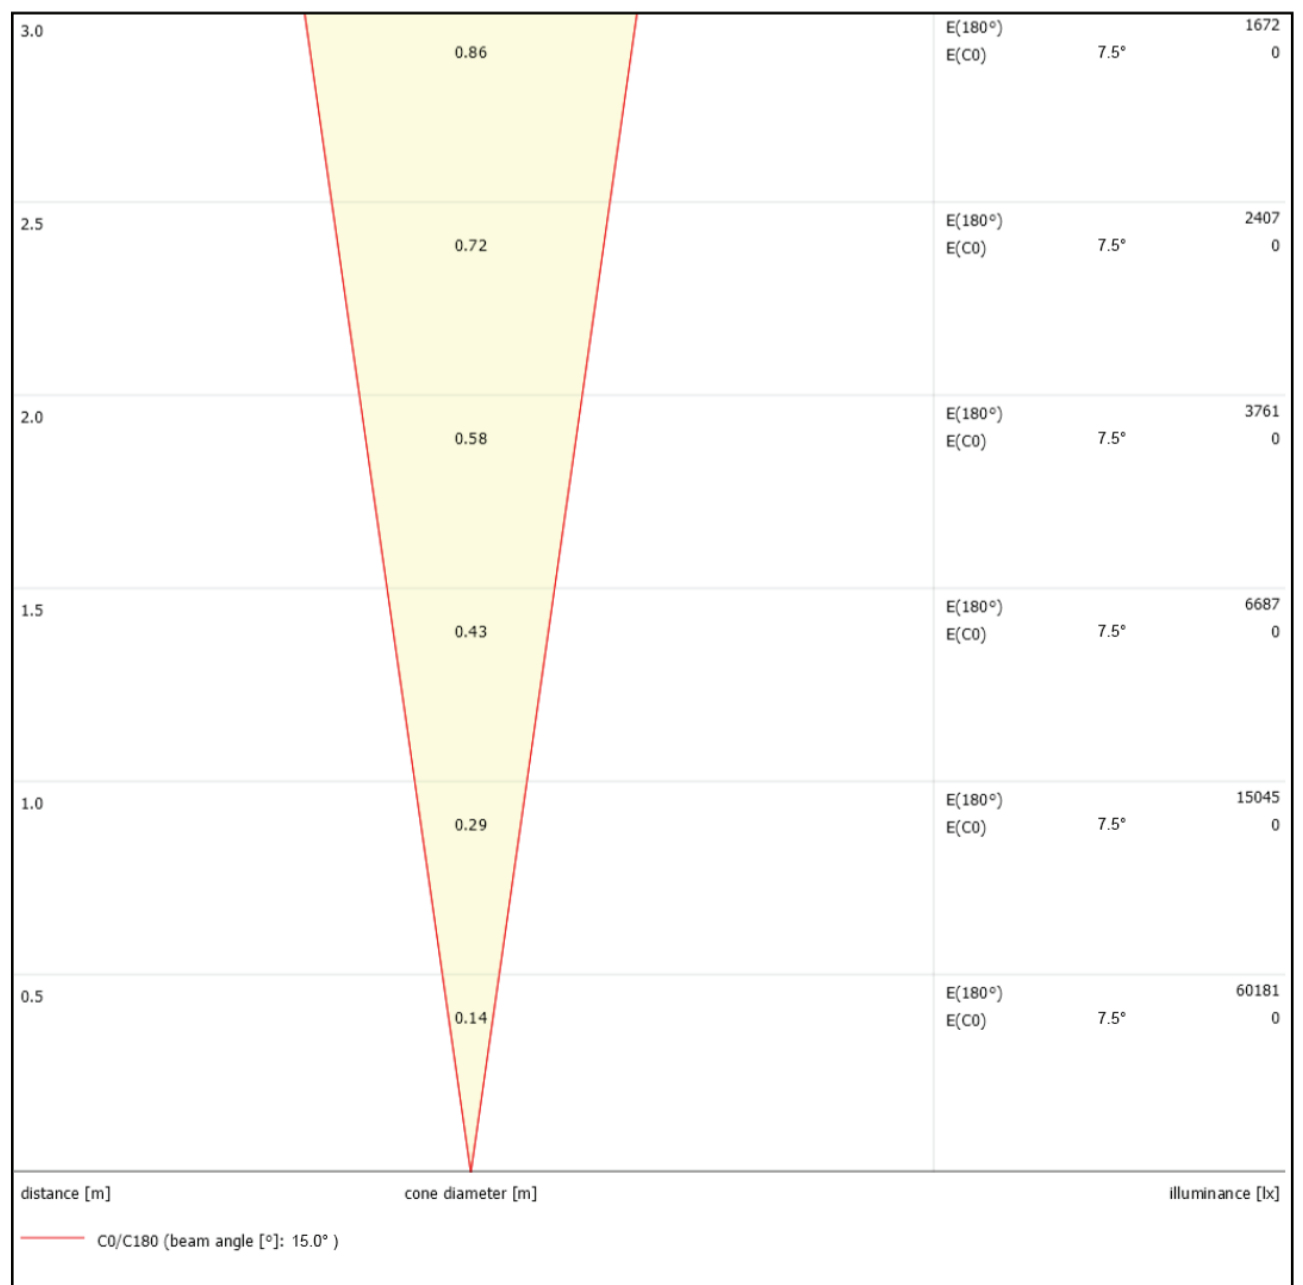







20 Watt 30° Beam Angle  
Polar Curve

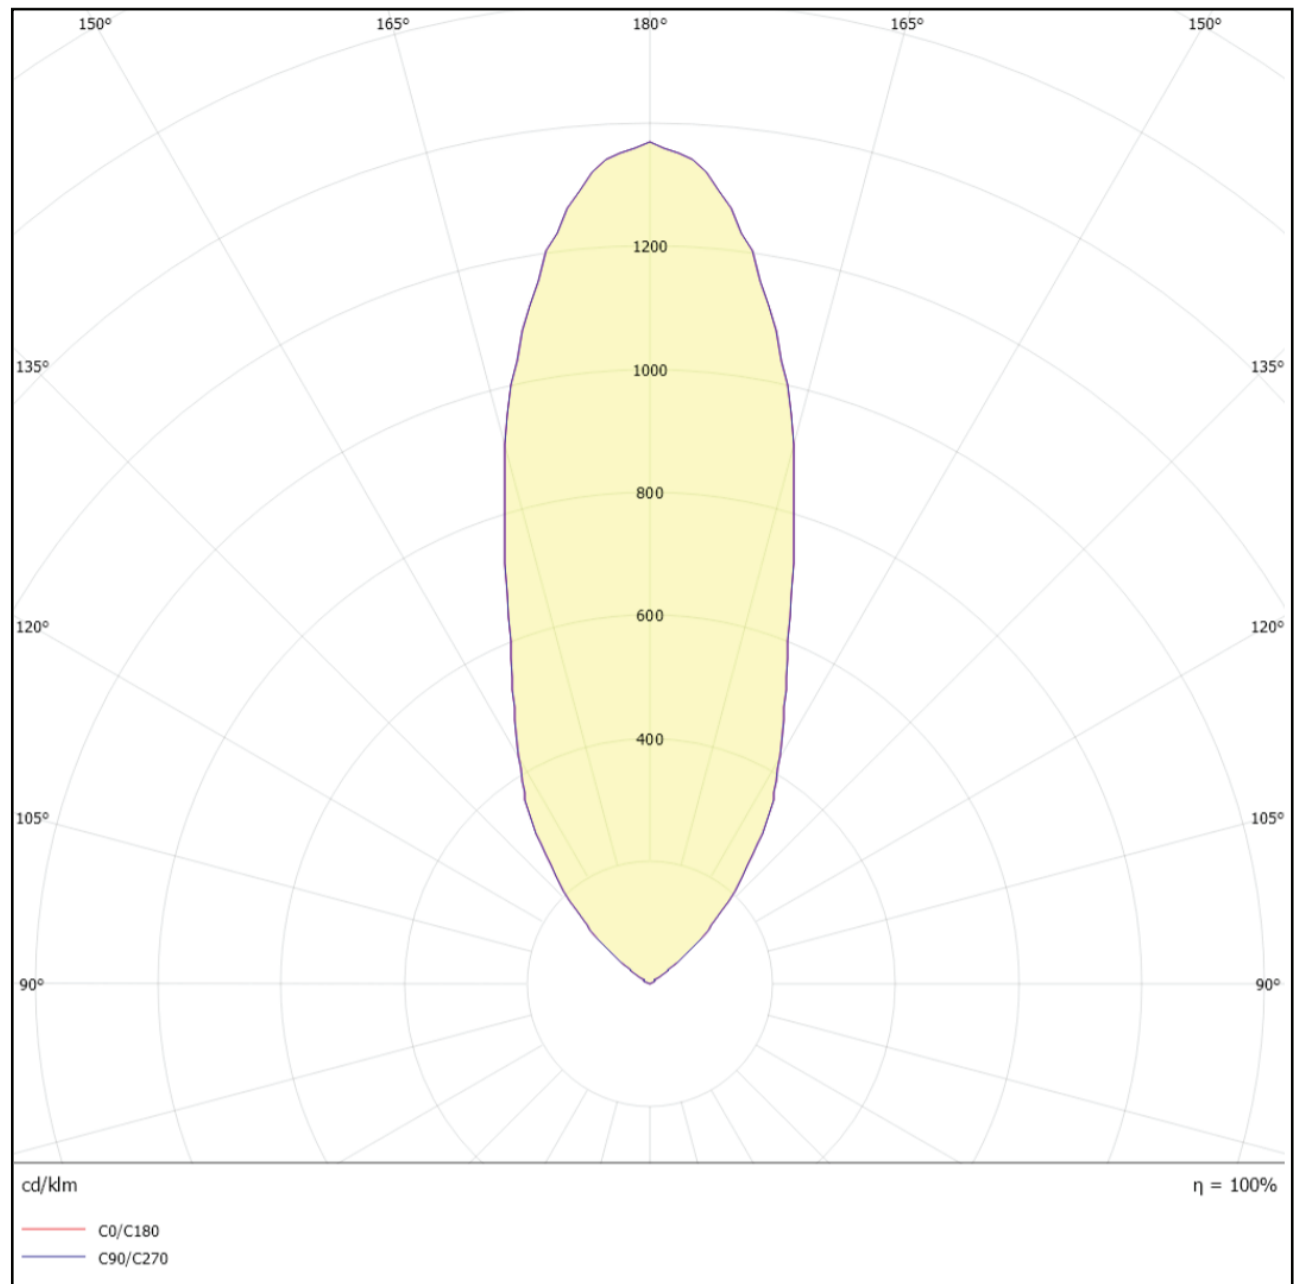


20 Watt 30° Beam Angle  
Cone Diagram

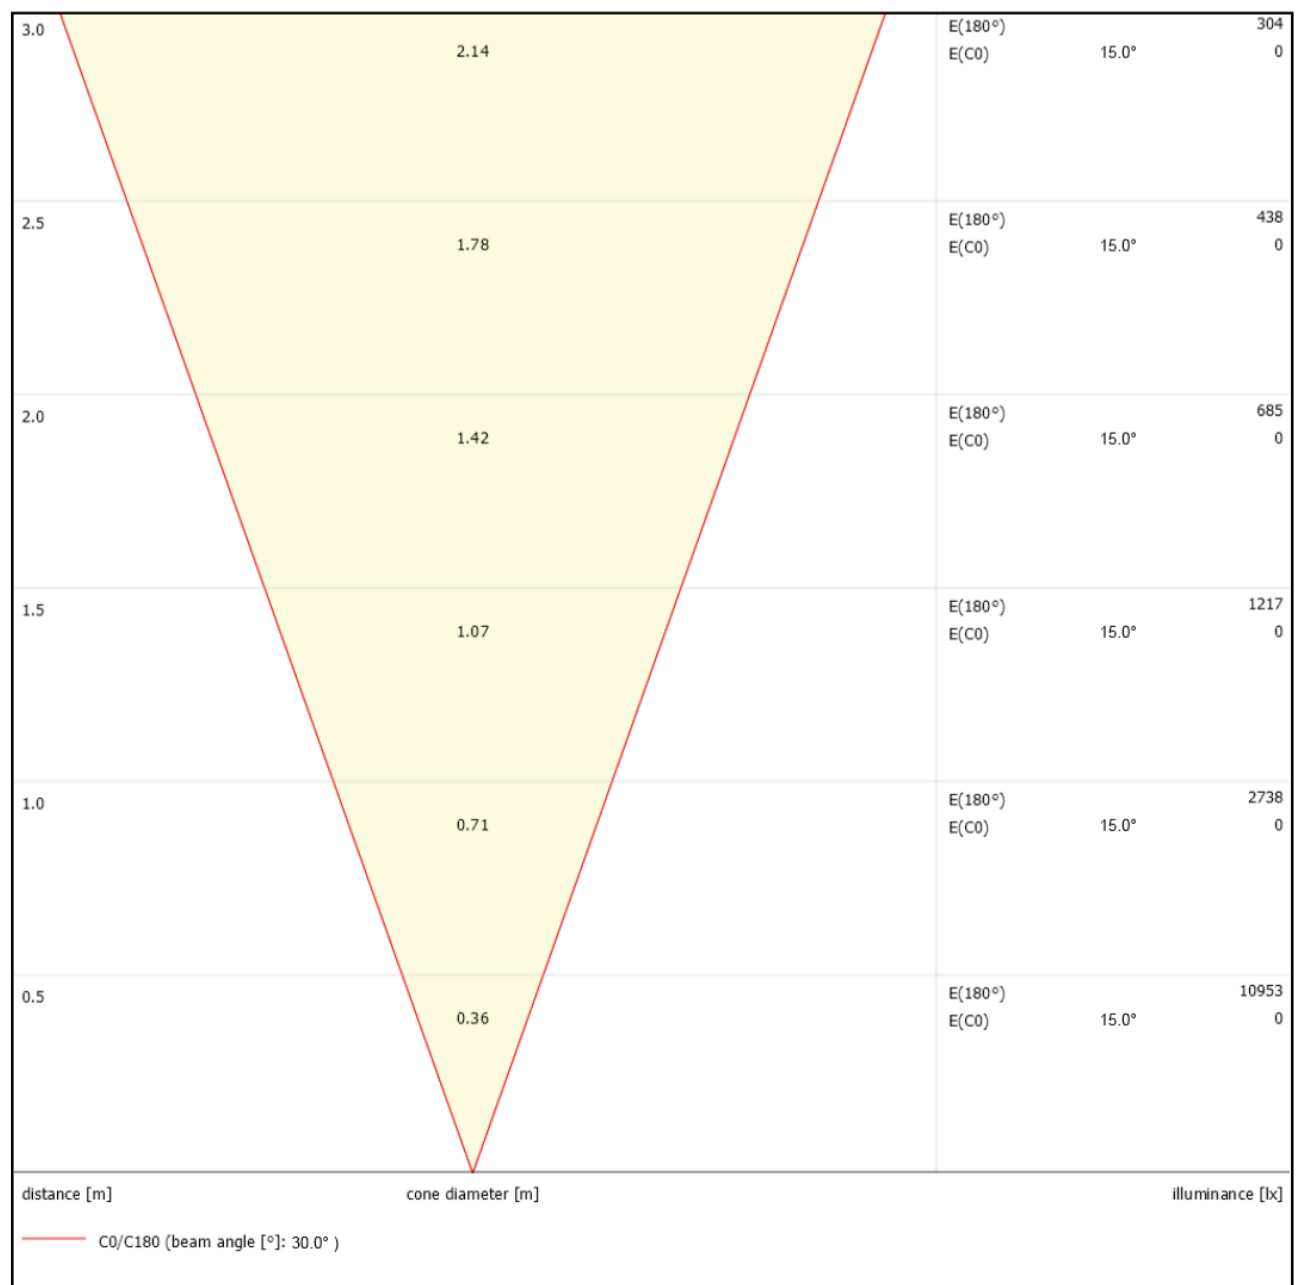





20 Watt 45° Beam Angle  
Polar Curve

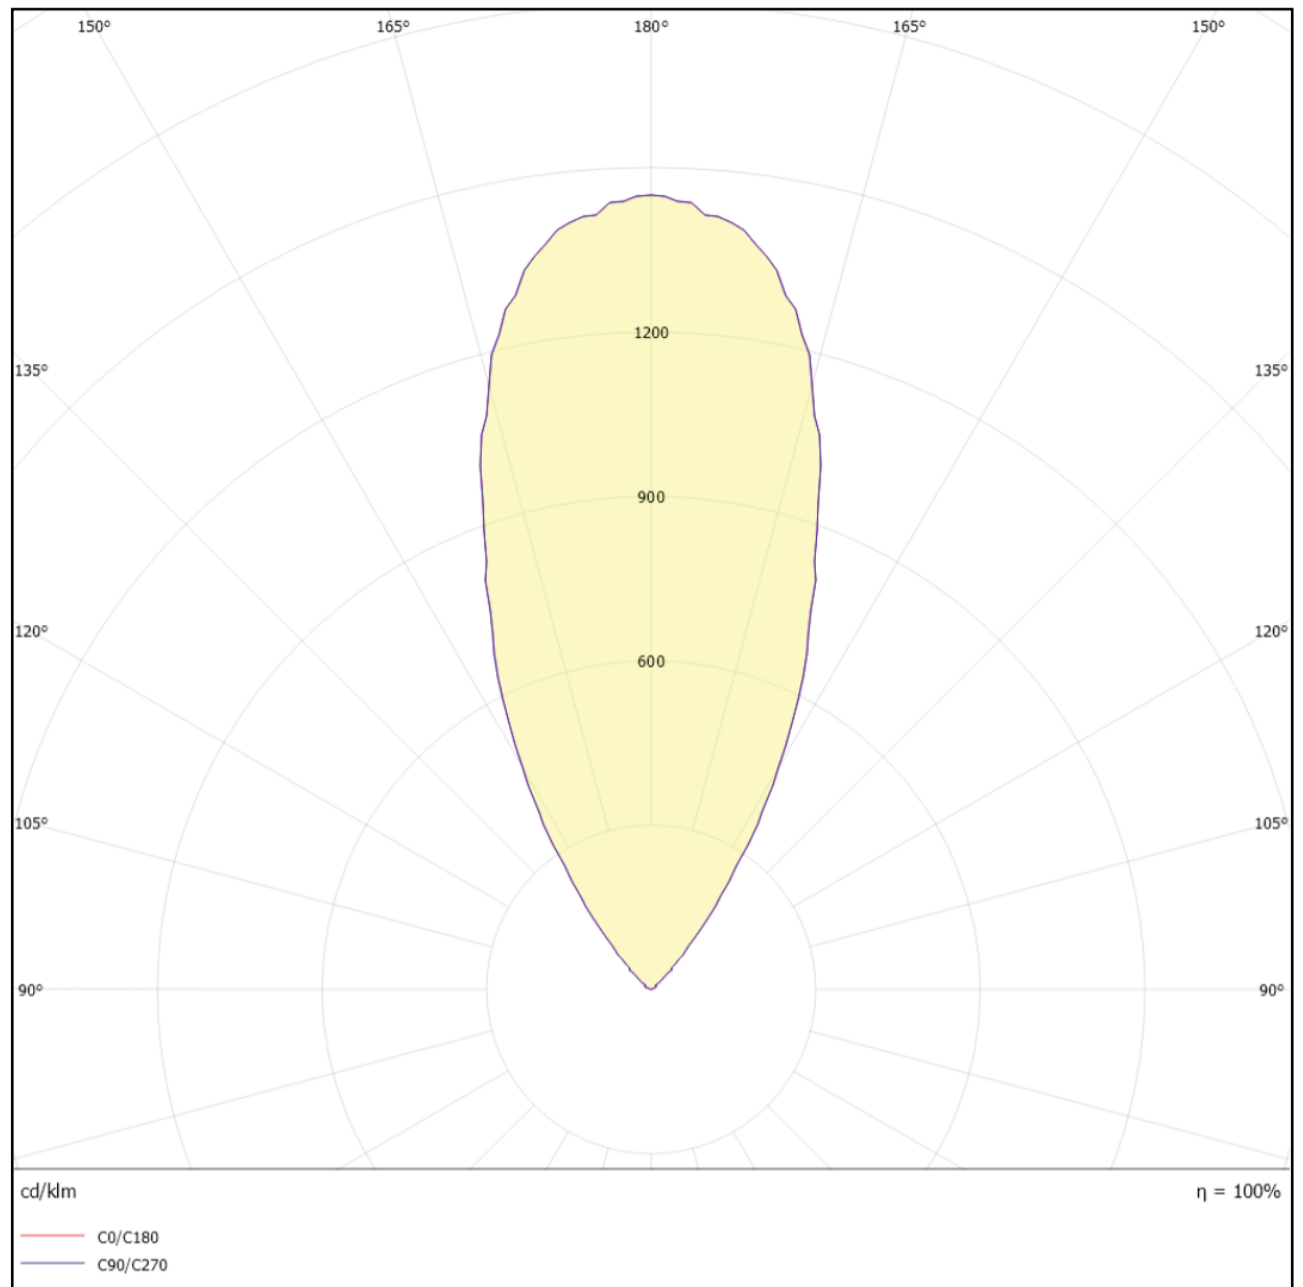


20 Watt 45° Beam Angle  
Cone Diagram

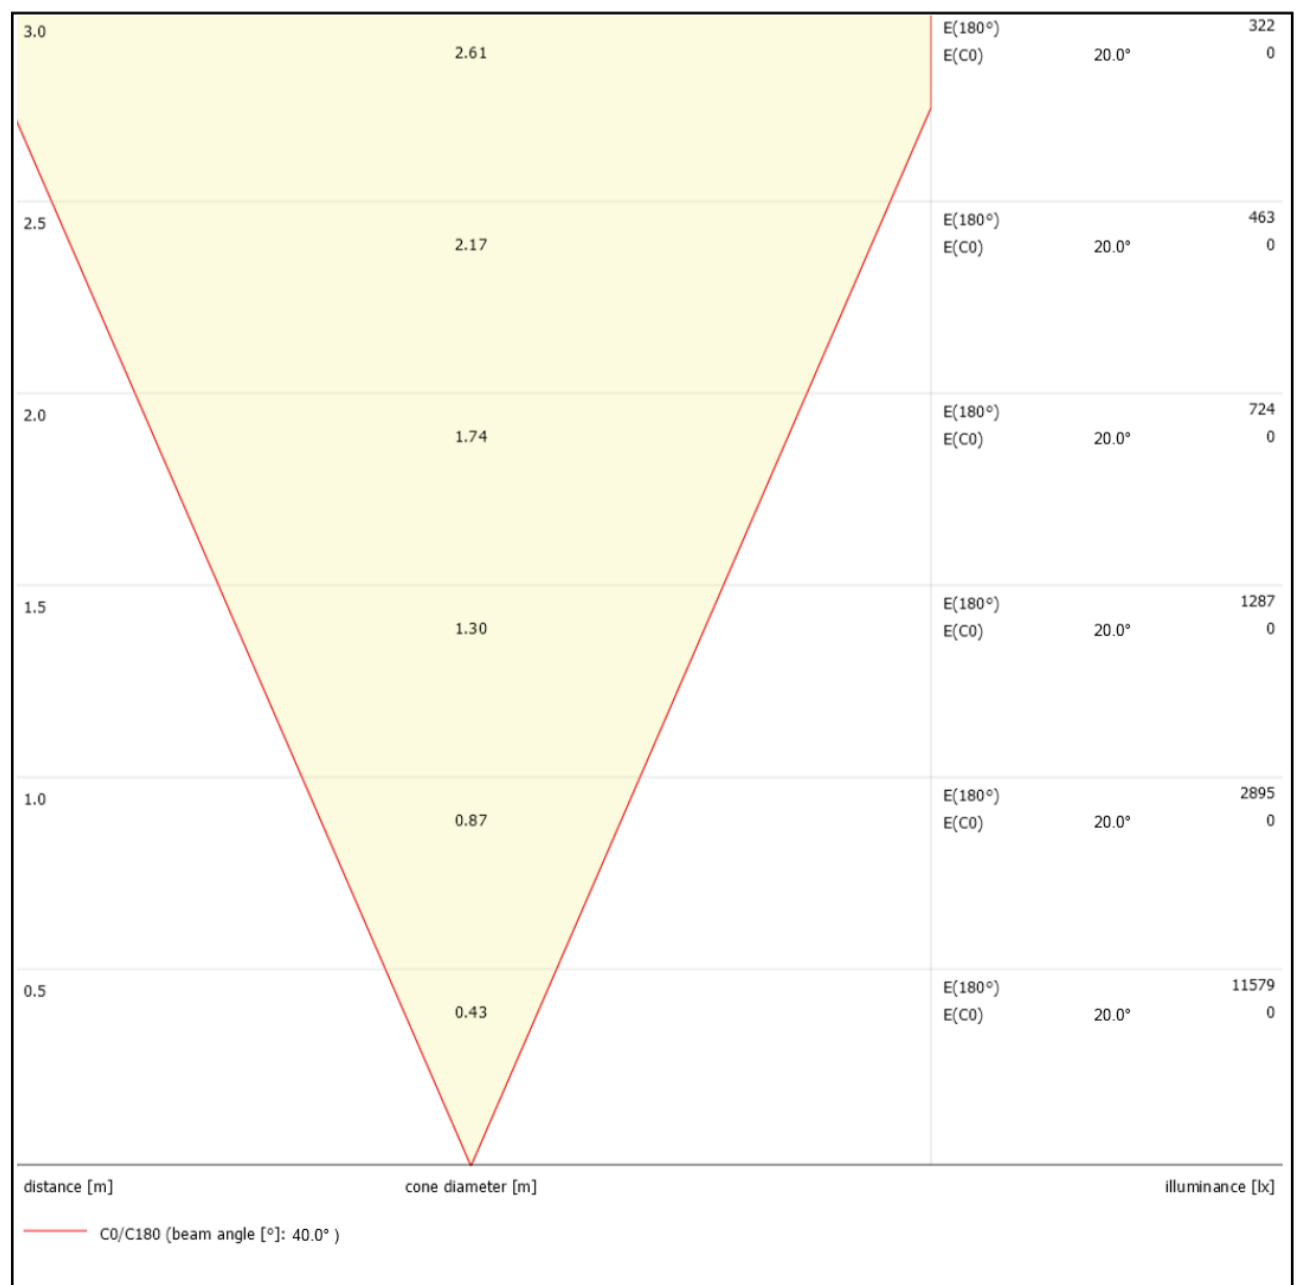




20 Watt 60° Beam Angle  
Polar Curve

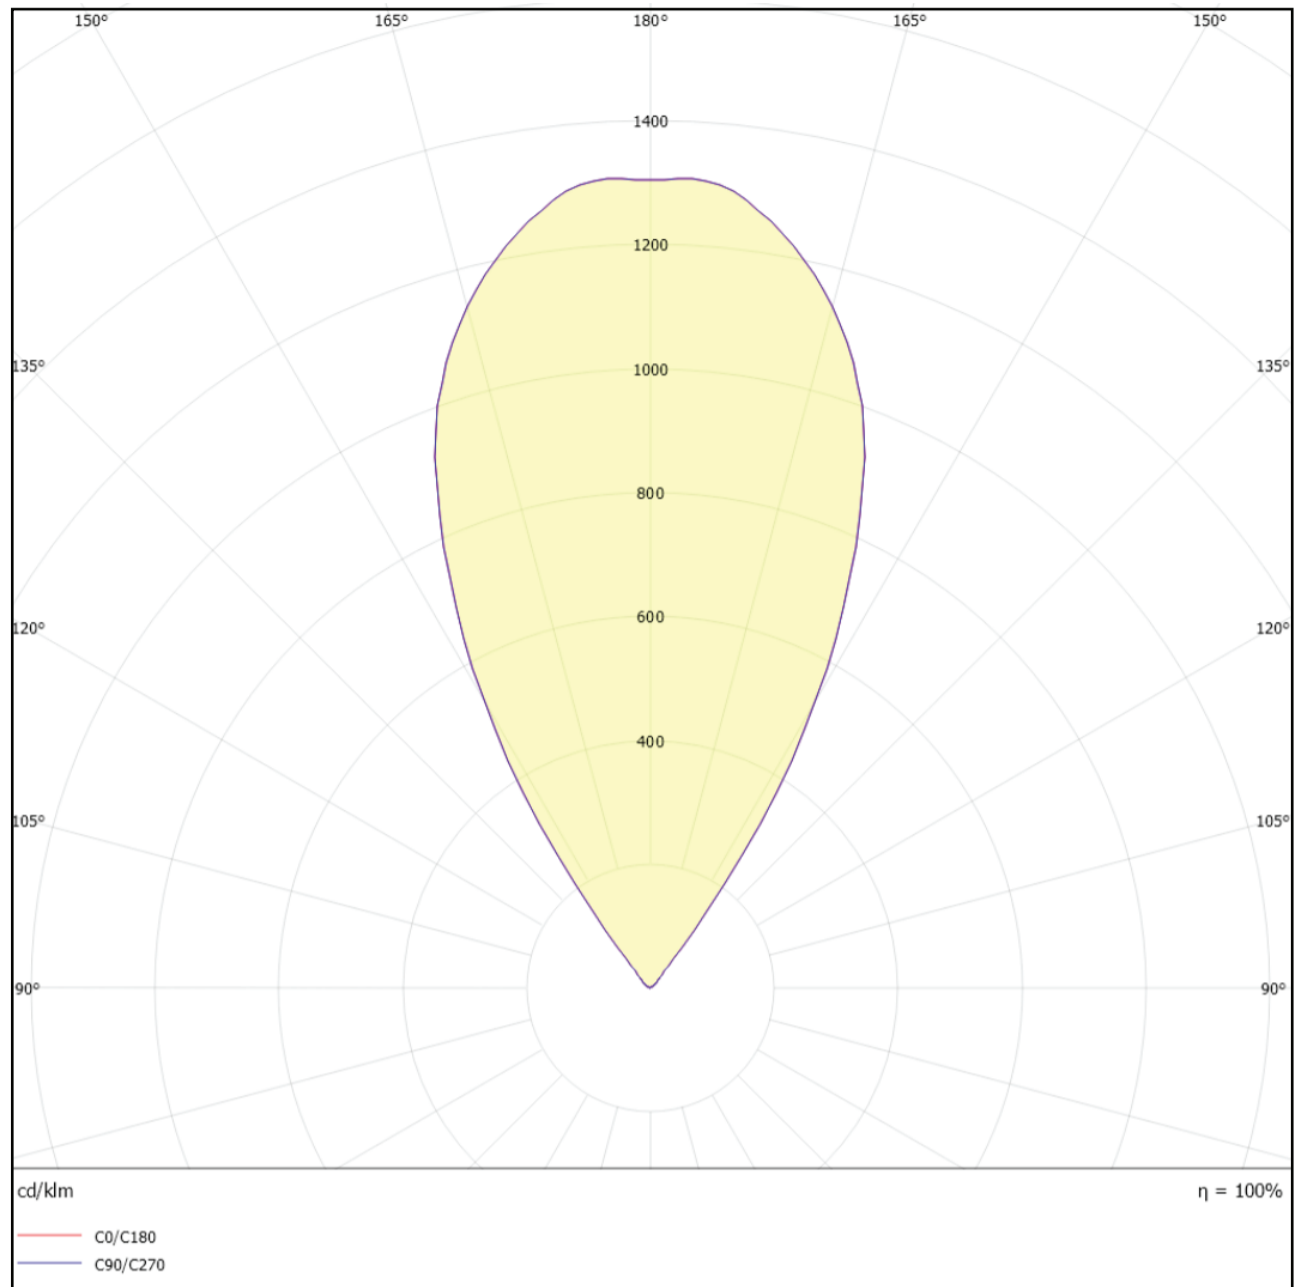

20 Watt 60° Beam Angle  
Cone Diagram

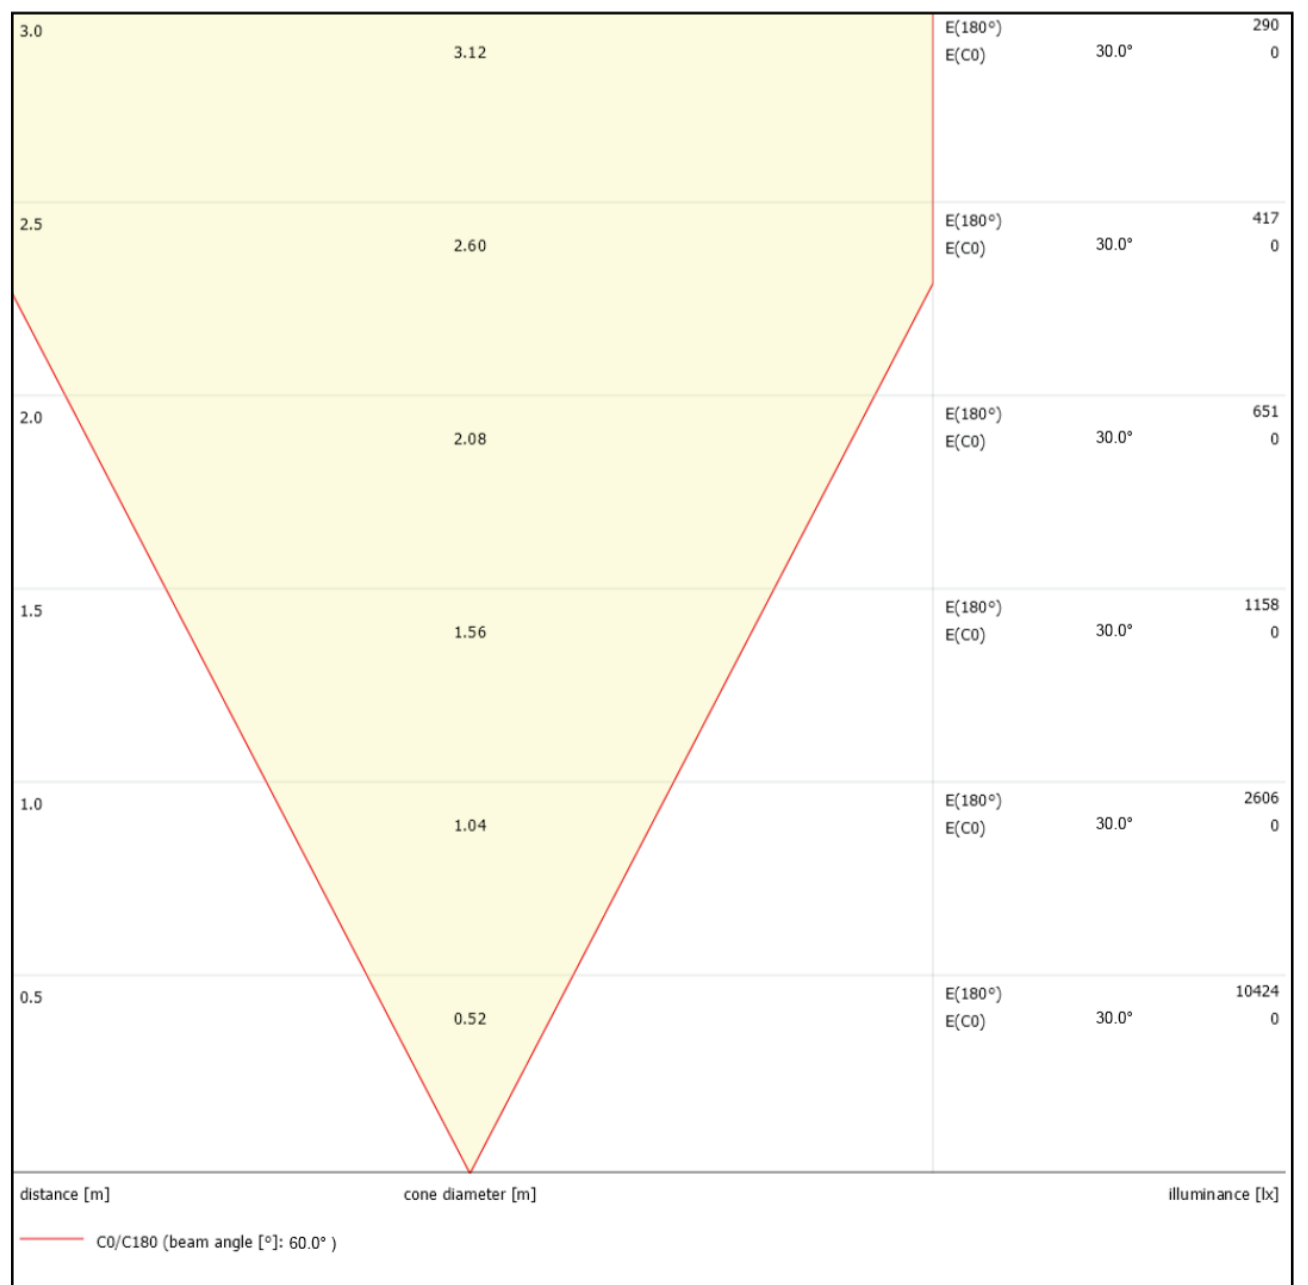

Flori FL

BRIGHTON

