



### DESCRIPTION

Ovo is a perfect wall luminaire that is ideal for uniformly illuminating areas in front of the installation surface & suitable for and for orientation lighting as well.





Driver

**LED Chip** 





### Illumination Data

Color to monute vac.	20001/ 1 / 2001/
Color temprature:	3000K   4000K
Lumen output:	2x475 LM
CRI	80
Beam angle	2x60° Wide

# Physical Specification

Material Finish	Die cast aluminium
Diffuser	Glass
Optics	Clear
Ingress protection (IP)	65
Impact Protection (IK)	08

### Electric Characteristics

#### **Light source** LED Built in LED type COB 2x5.6 Watt **Power** P.F >0.9 **LED** chip Lumileds Driver Philips

### Installation

Installation	Surface Wall Mounted	
Wiring	Product complete with	
	electronic components	

## Luminaire Body Finish Color

White Ral 9003	
Grey Ral 9006	
Black Ral 9005	

# Certificate & Warranty

Certification	CB   CE   LM79   LM80	
	TM21   Photo biological	
Lifetime expectancy	50.000 hrs	
Warranty duration	Up to 5 years	







 $\cdot$   ${}^{\star}\!$ All dimensions in these sketches are in millimeters ${}^{\star}$  -

#### **Dimnesions & specs of luminaires**


Dim	Ø	Height
1	100mm	200mm

\*All dimensions in this schedule table are in millimeters\*

#### **Specs**

Wattage (W)	lumen
2x5 6 watt	2v475li

Product coding system

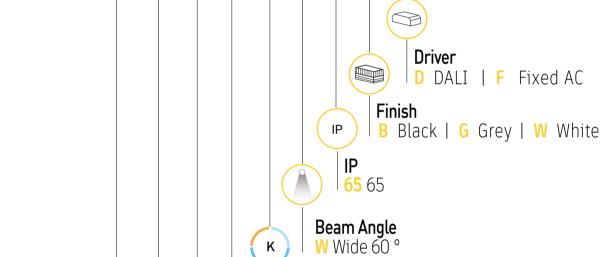


CCT (K)

30 3000K | 40 4000K

Κ

CRI

BR - OV C XX.8 XX W 65 X - X



Mounting C Surface

Family Ovo- OV


BR - OV C XX.8 XX W 65 X - X

Configure luminaire specs & send us the code for order confirmation



Optional Application




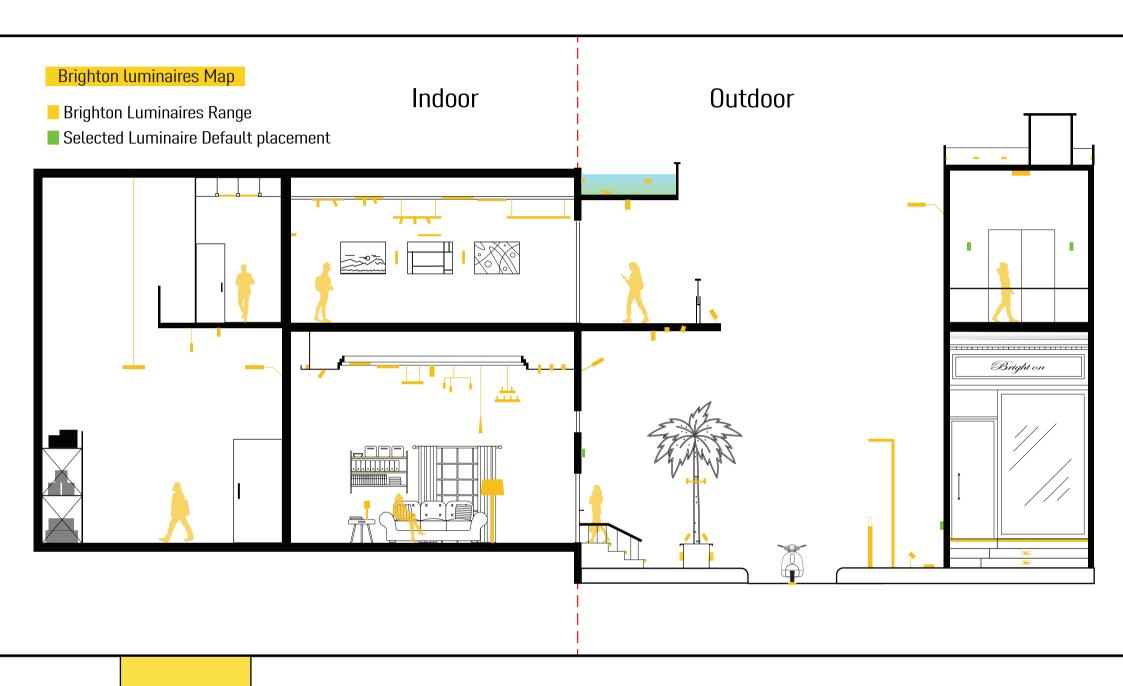

Accessories



12 Watt 2x60° Wide Polar curve

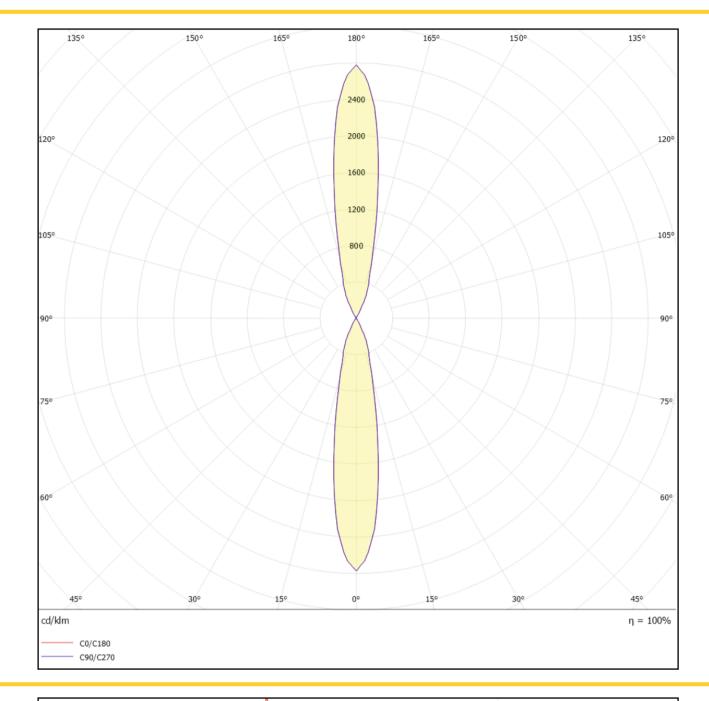

12 Watt 2x60° Wide Cone Diagram

