

DESCRIPTION



Thanks to their unique robust design, in-ground outdoor luminaires Vega series are frequently found in public areas, allowing possible light characteristics with light from the ground – from location lights to adjustable floodlights.



Driver



LED Chip



Illumination Data

Color temperature:	3000K 4000K
Lumen output:	660 LM 1320 LM 1980 LM 2970LM 3960 LM
CRI	80
Beam angle	10° Spot 24° Narrow 40° Medium 60° Wide

Physical Specification

Material Finish	Die cast aluminium Stainless steel frame
Diffuser	Glass
Optics	LENS
Ingress protection (IP)	67
Impact Protection (IK)	10

Electric Characteristics

Light source	LED Built in
LED type	SMD
Power	6 Watt 12 Watt 18 Watt 27Watt 36 Watt
P.F	>0.9
LED chip	Cree
Driver	Meanwell

Installation

Installation	Inground recessed
Wiring	Product complete with electronic components

Luminaire Body Finish Color

Black Ral 9005




Certificate & Warranty

Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Vega
Uplight

Dimensions & Specs

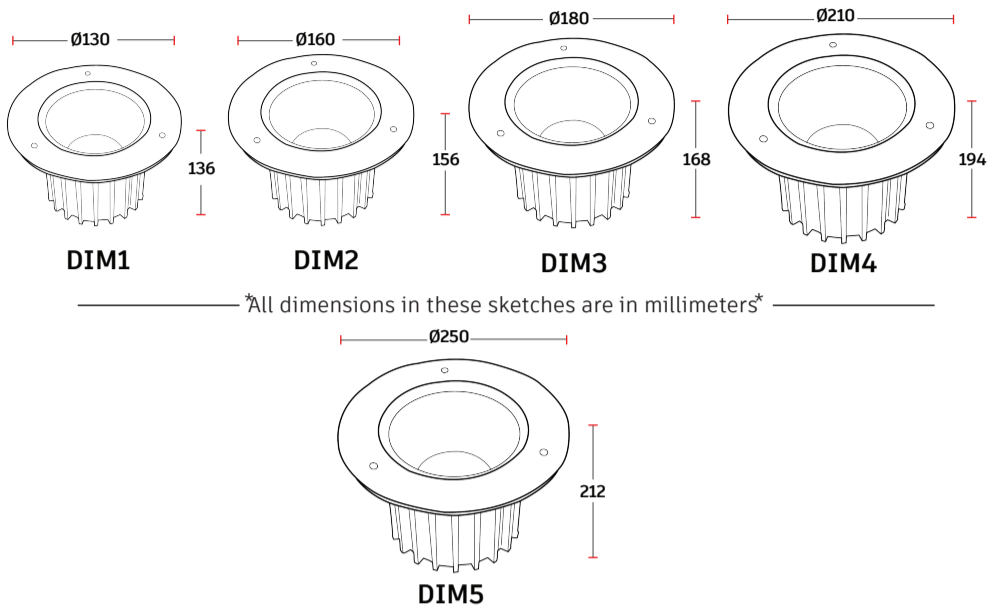

Dimensions of luminaires

Dim	Ø	H
1	130mm	136mm
2	160mm	156mm
3	180mm	168mm
4	210mm	194mm
5	250mm	212mm


Specs

Wattage (W)	lumen (lm)
6 watt	660lm
12 watt	1320lm
18 watt	1980lm
27 watt	2970lm
36 watt	3960lm

All dimensions in this schedule table are in millimeters


Product coding system

BR - VE X X R XX.8 XX X 67 B - X

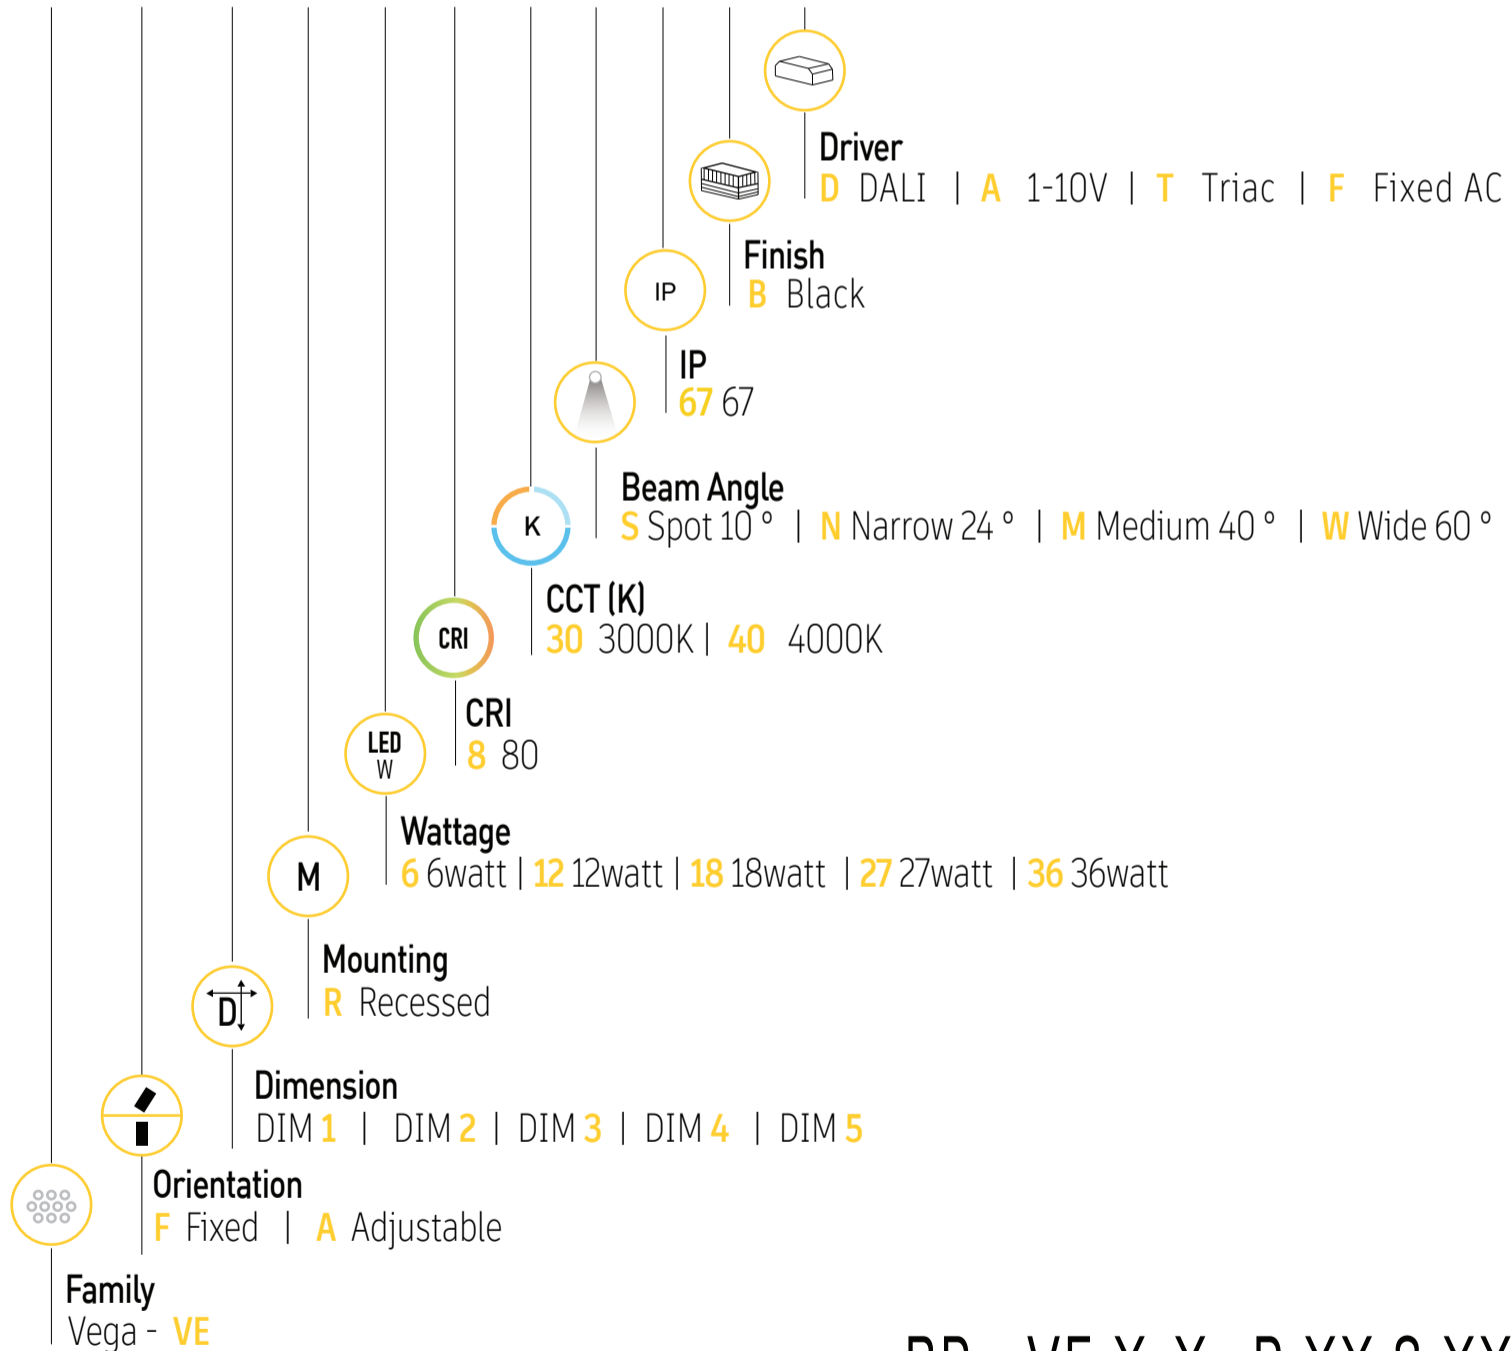

BR - VE X X R XX.8 XX X 67 B - X

Configure luminaire specs & send us the code for order confirmation



Optional Application



RGB




Dimmable

Brighton luminaires Map


- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor


Outdoor

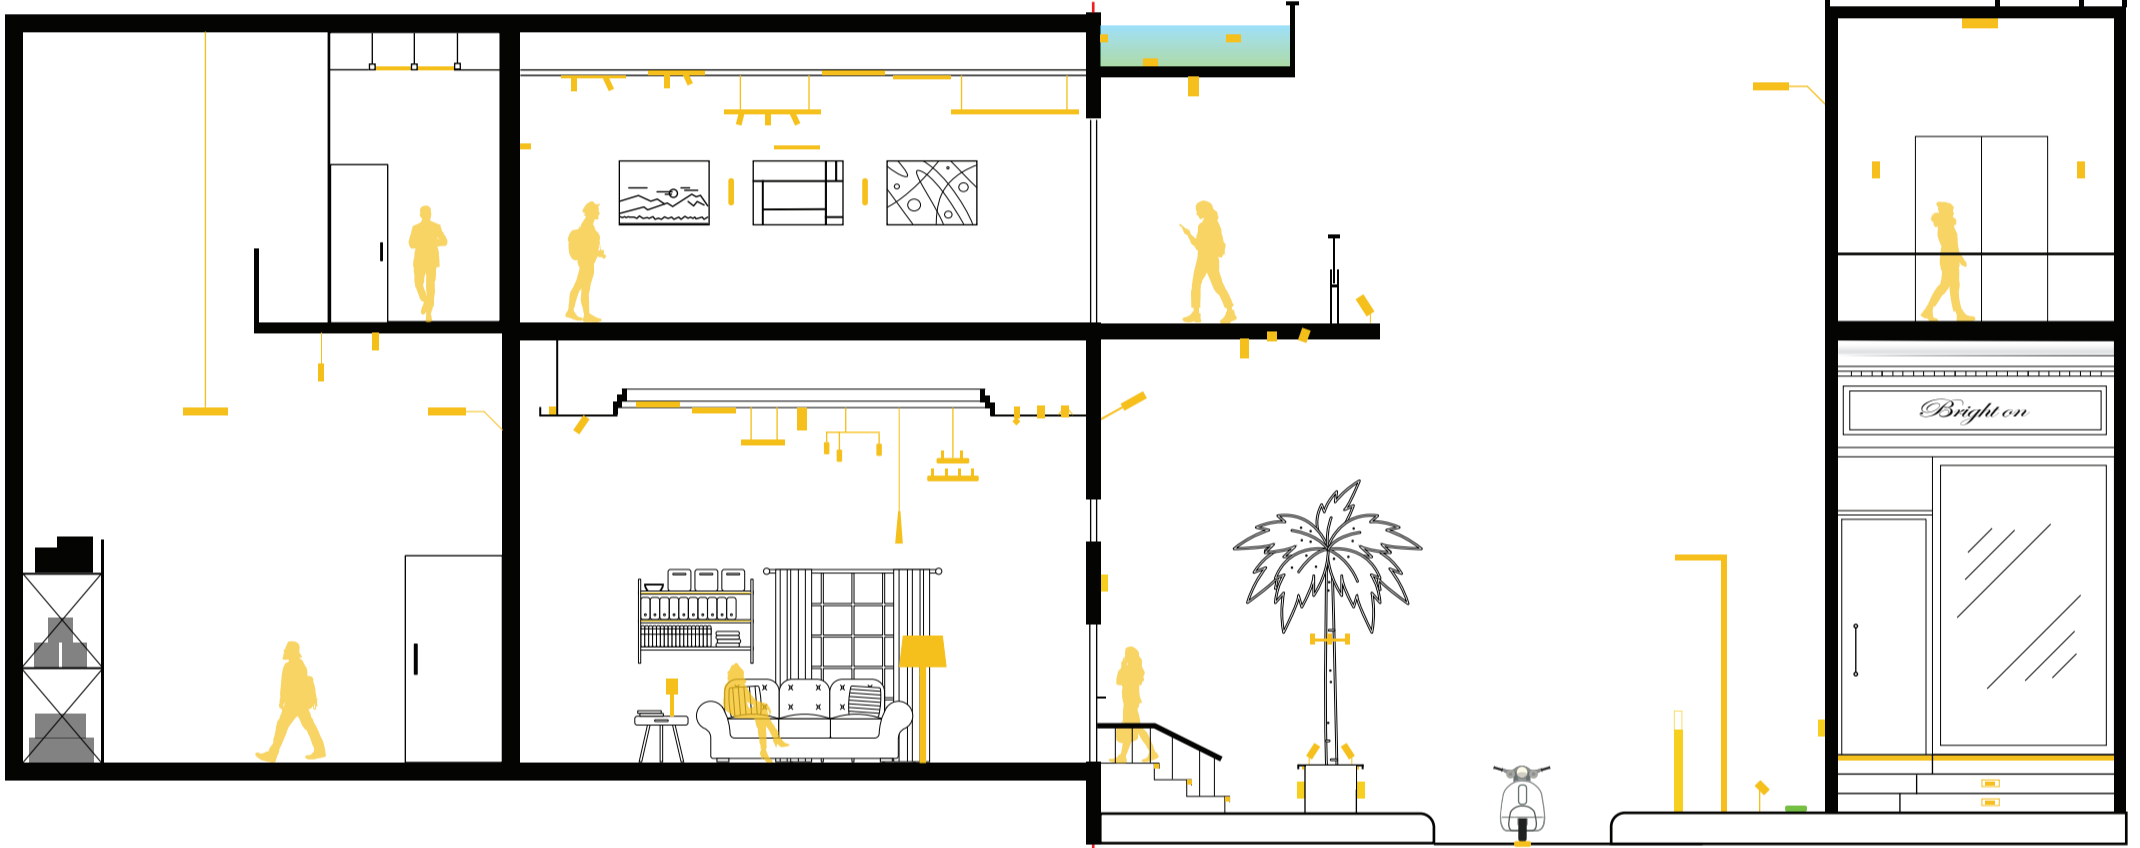


Accessories




18 Watt 10° Beam Angle
Polar Curve

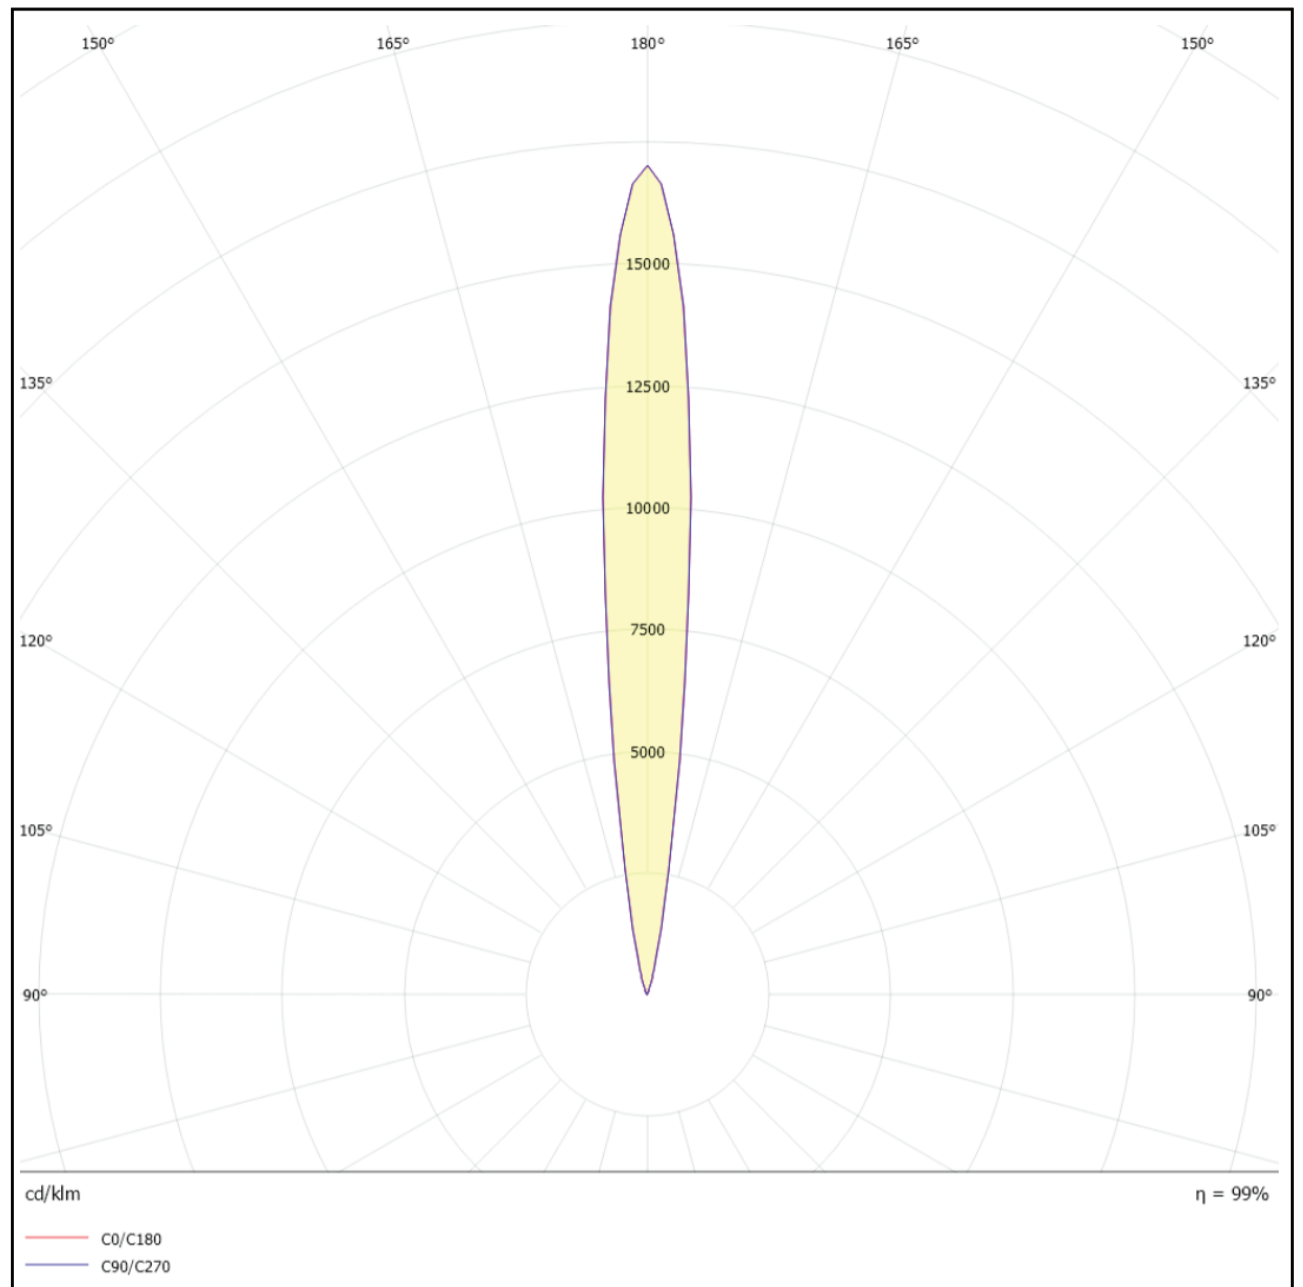


18 Watt 10° Beam Angle
Cone Diagram

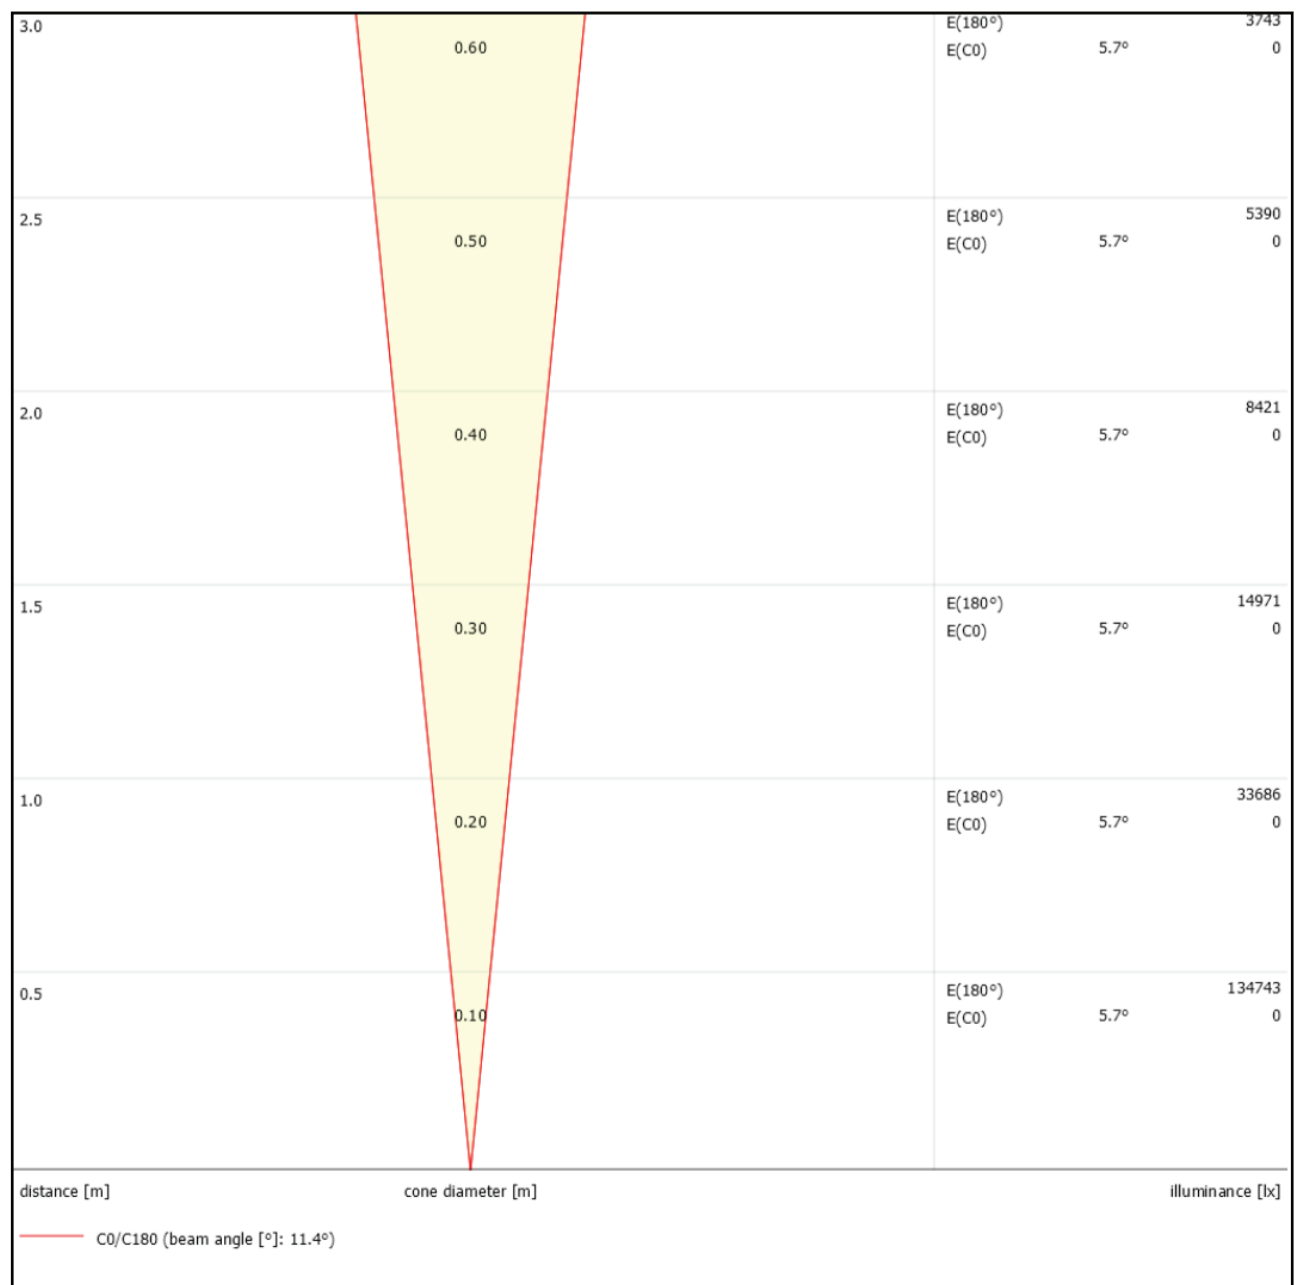





18 Watt 24° Beam Angle
Polar Curve

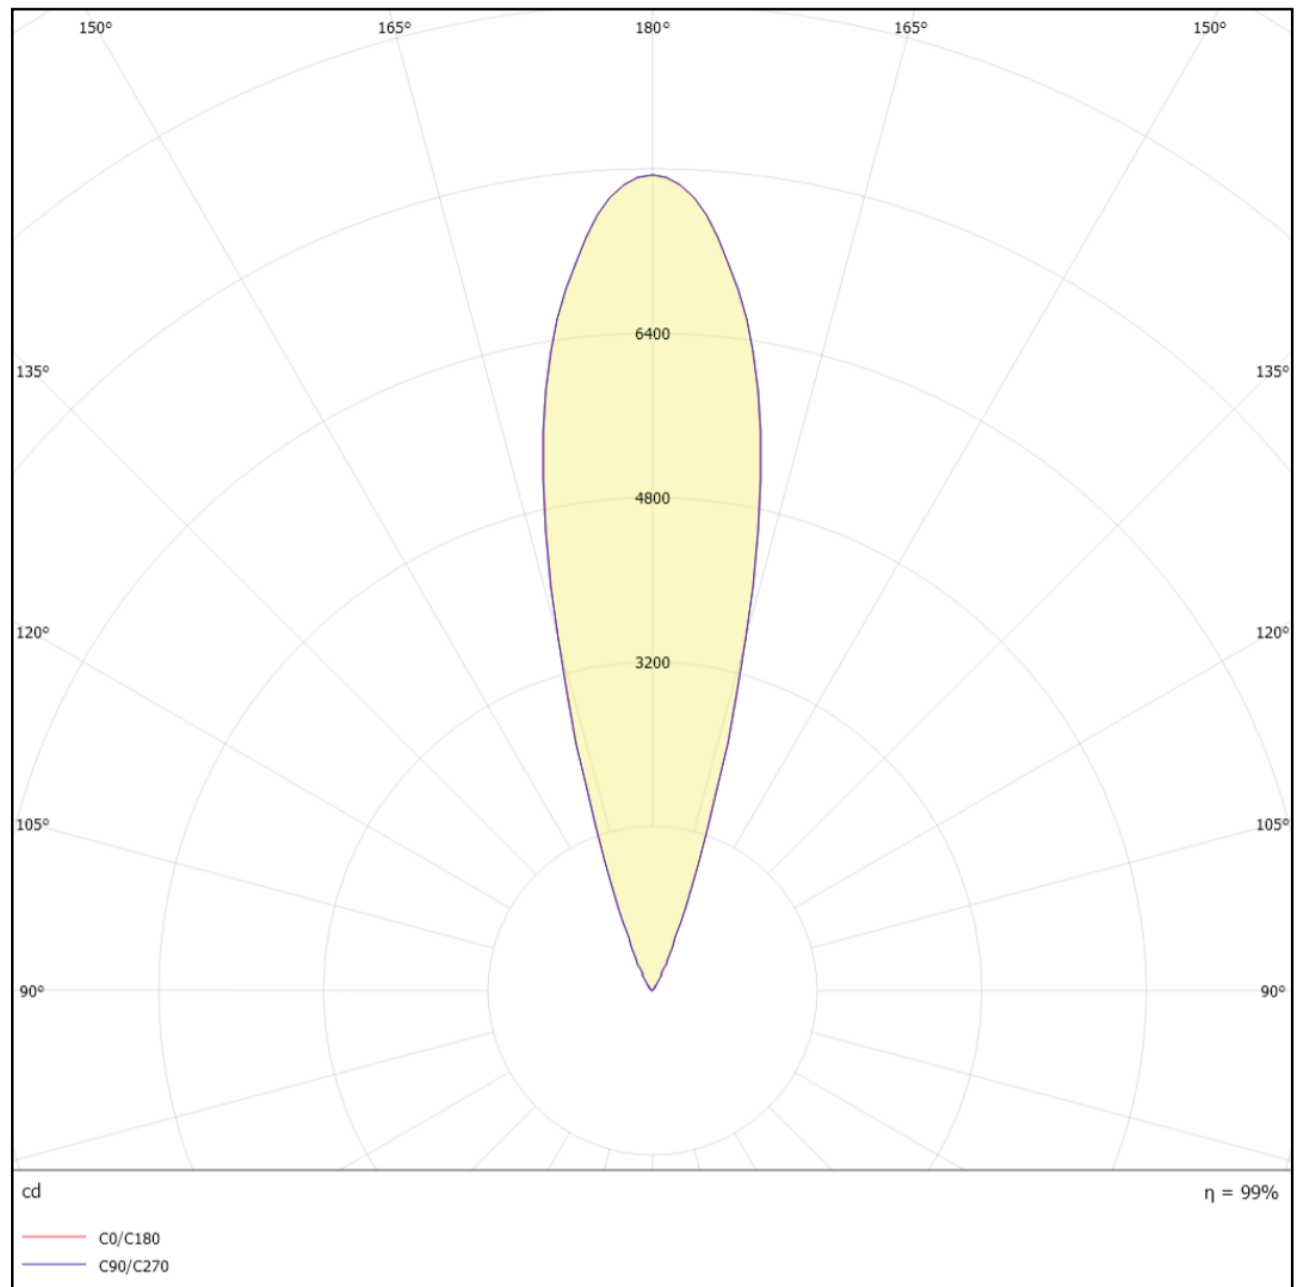


18 Watt 24° Beam Angle
Cone Diagram

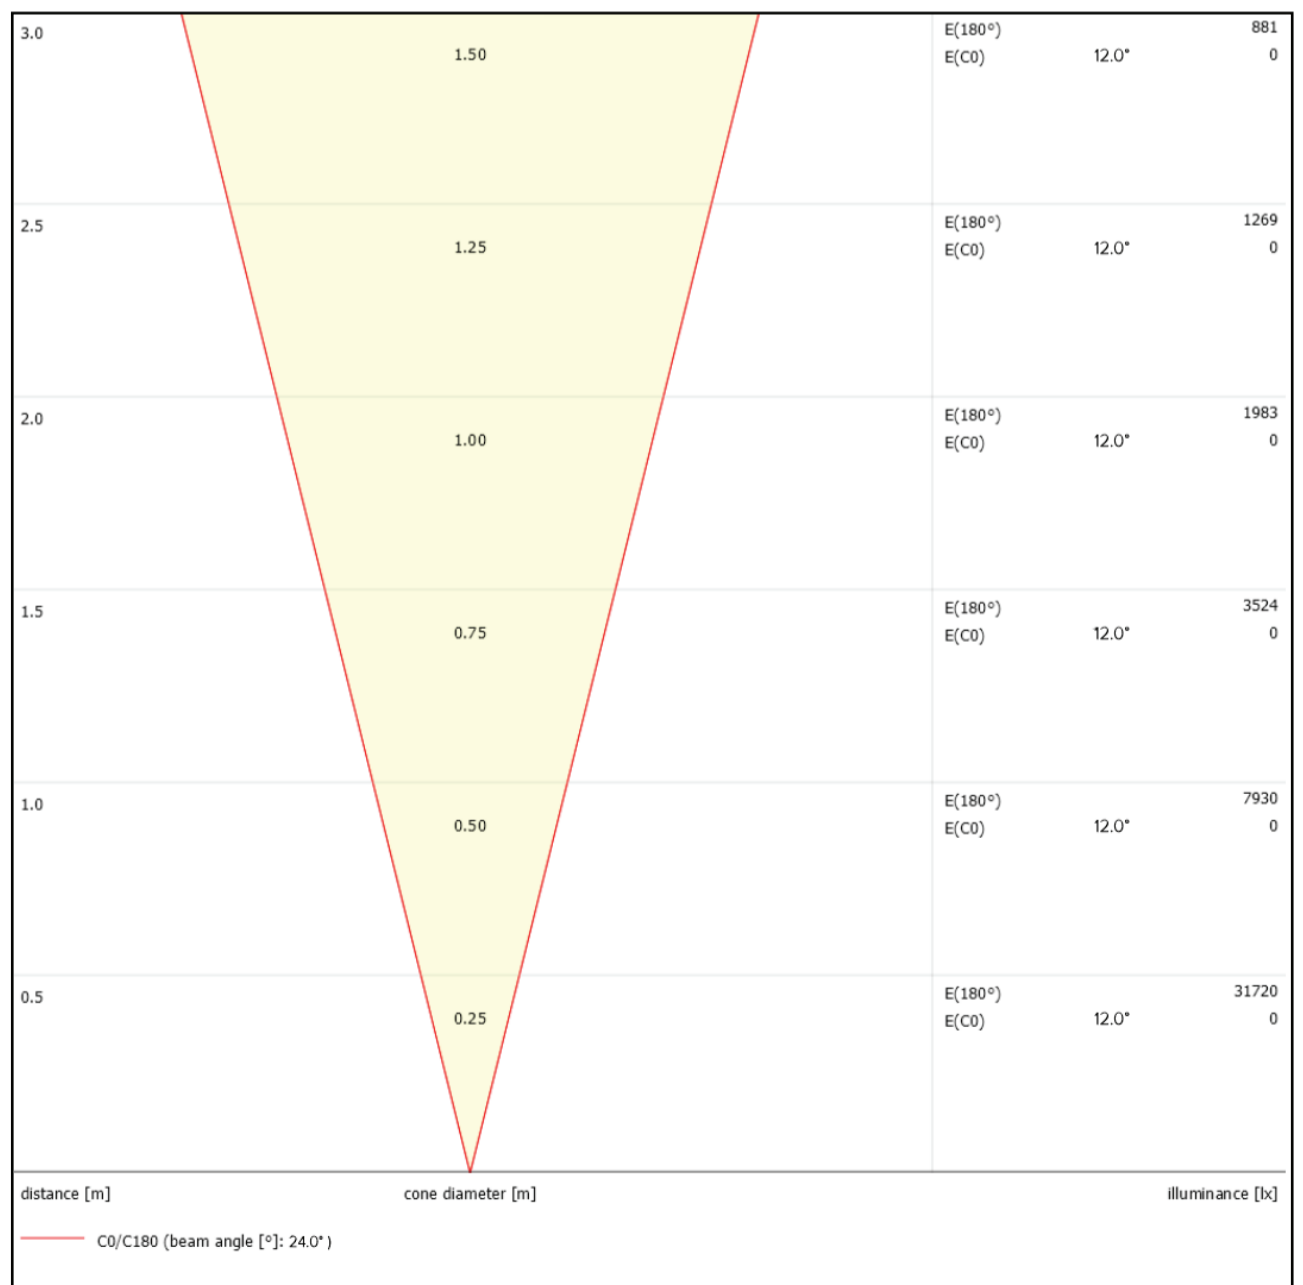





18 Watt 40° Beam Angle
Polar Curve

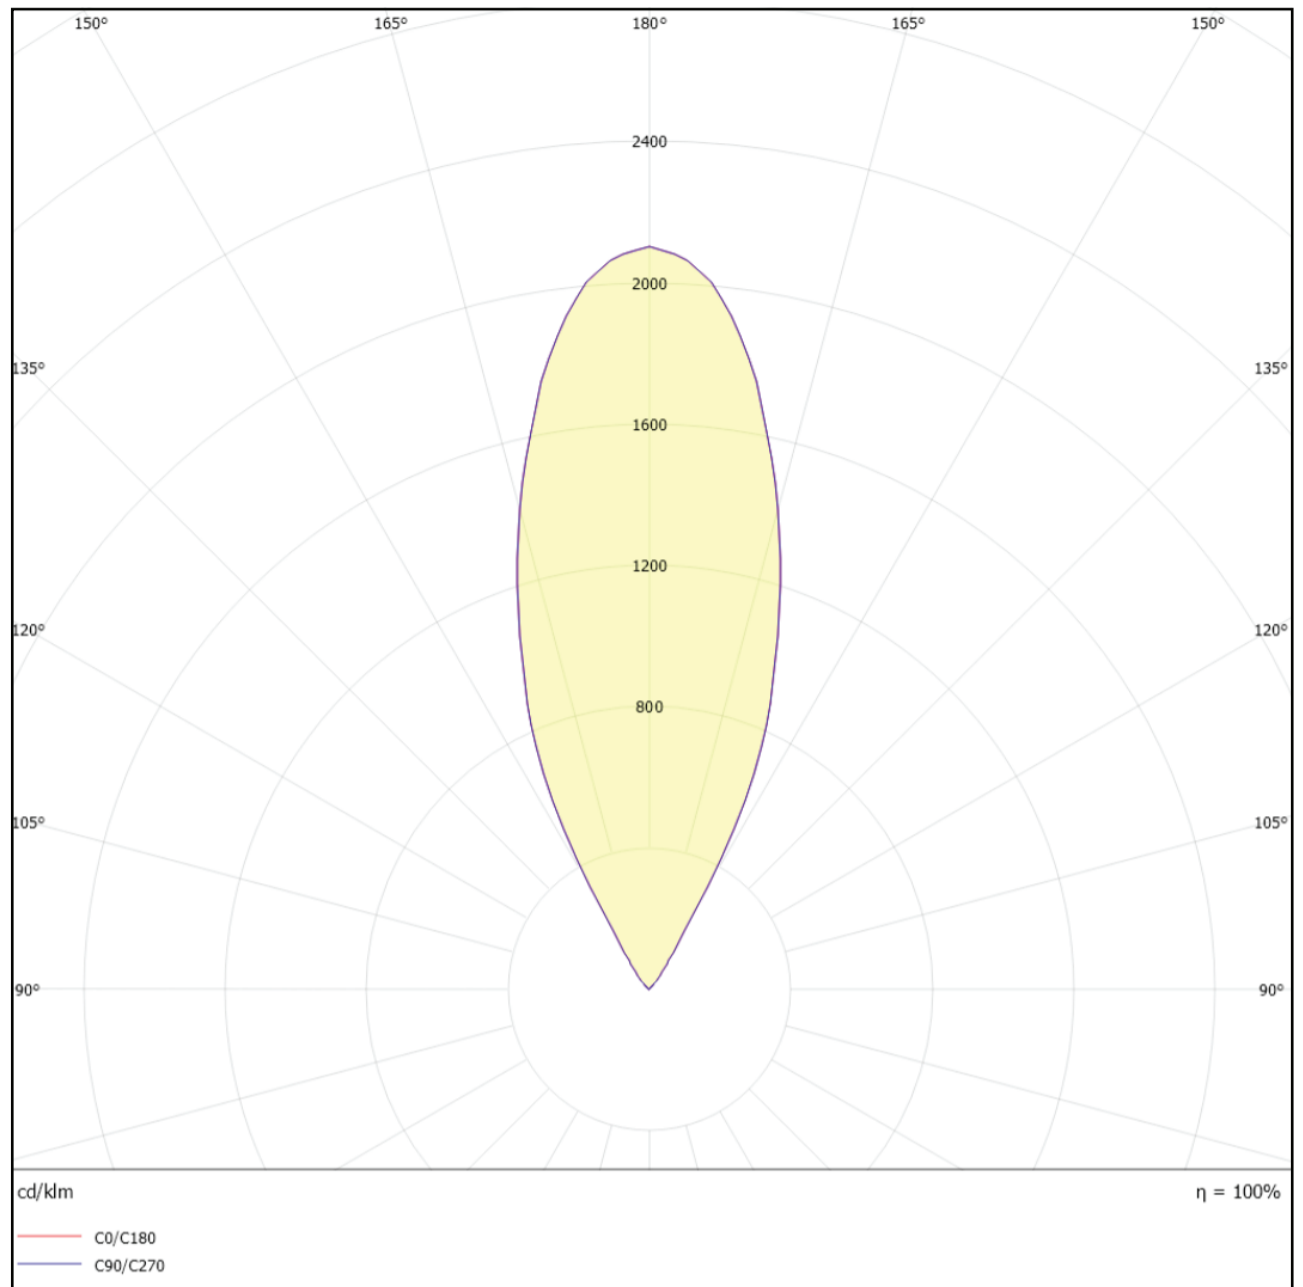


18 Watt 40° Beam Angle
Cone Diagram

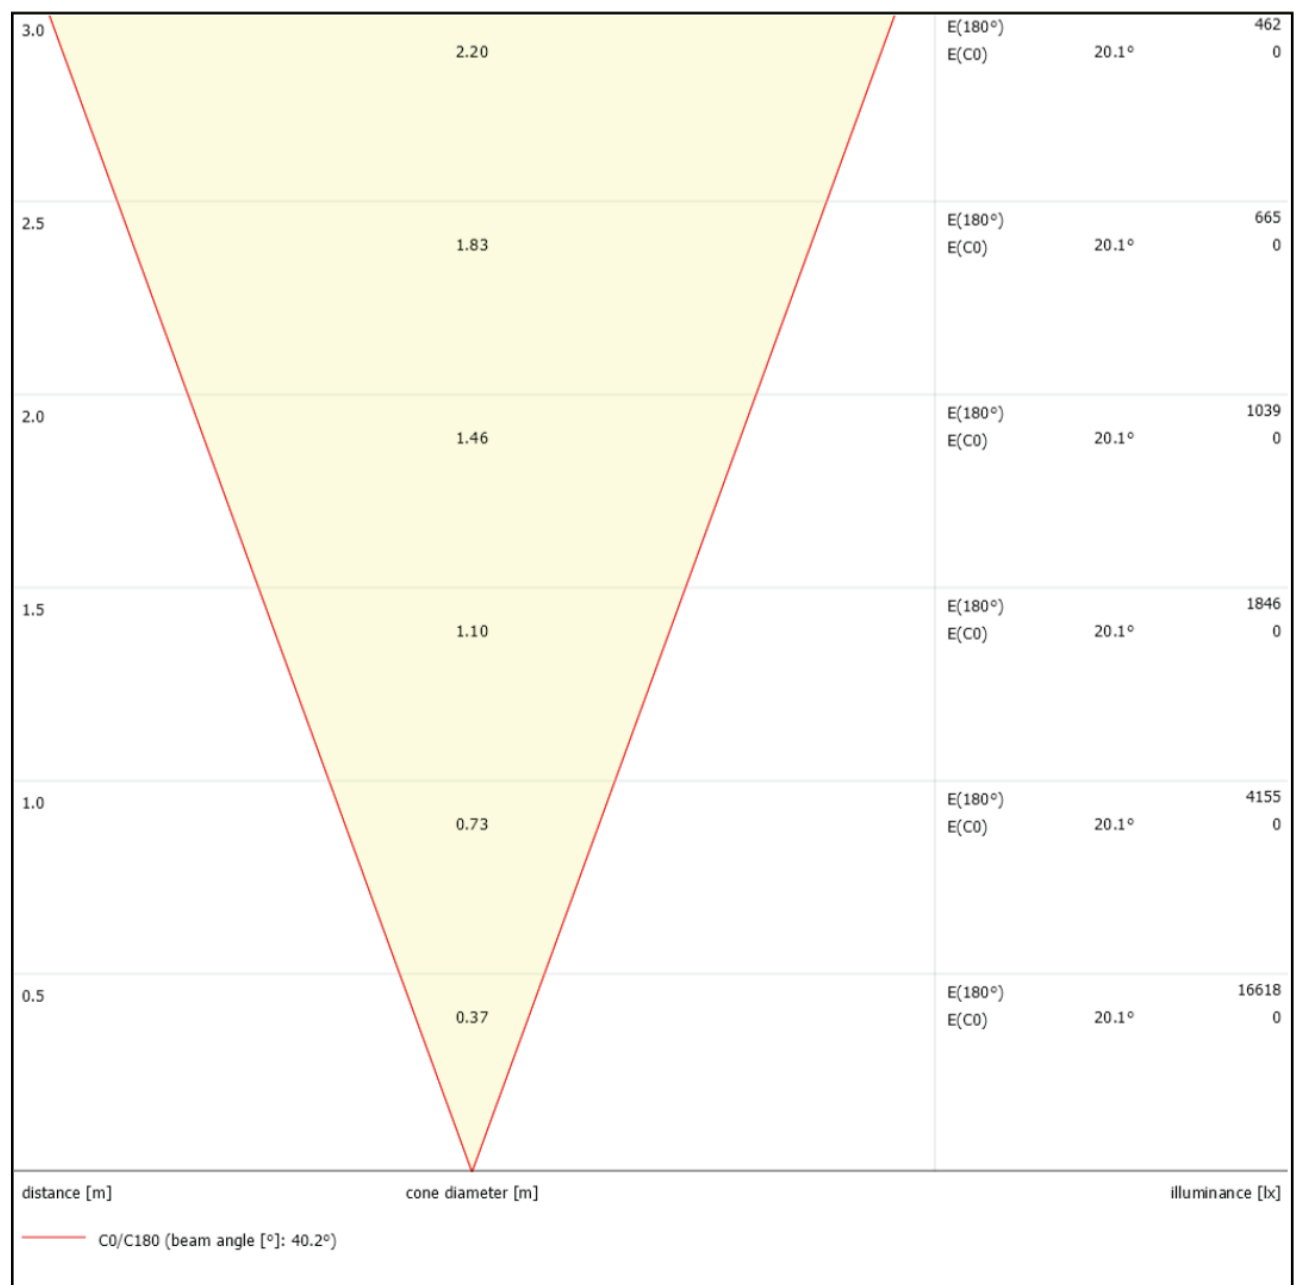




36 Watt 60° Beam Angle
Polar Curve

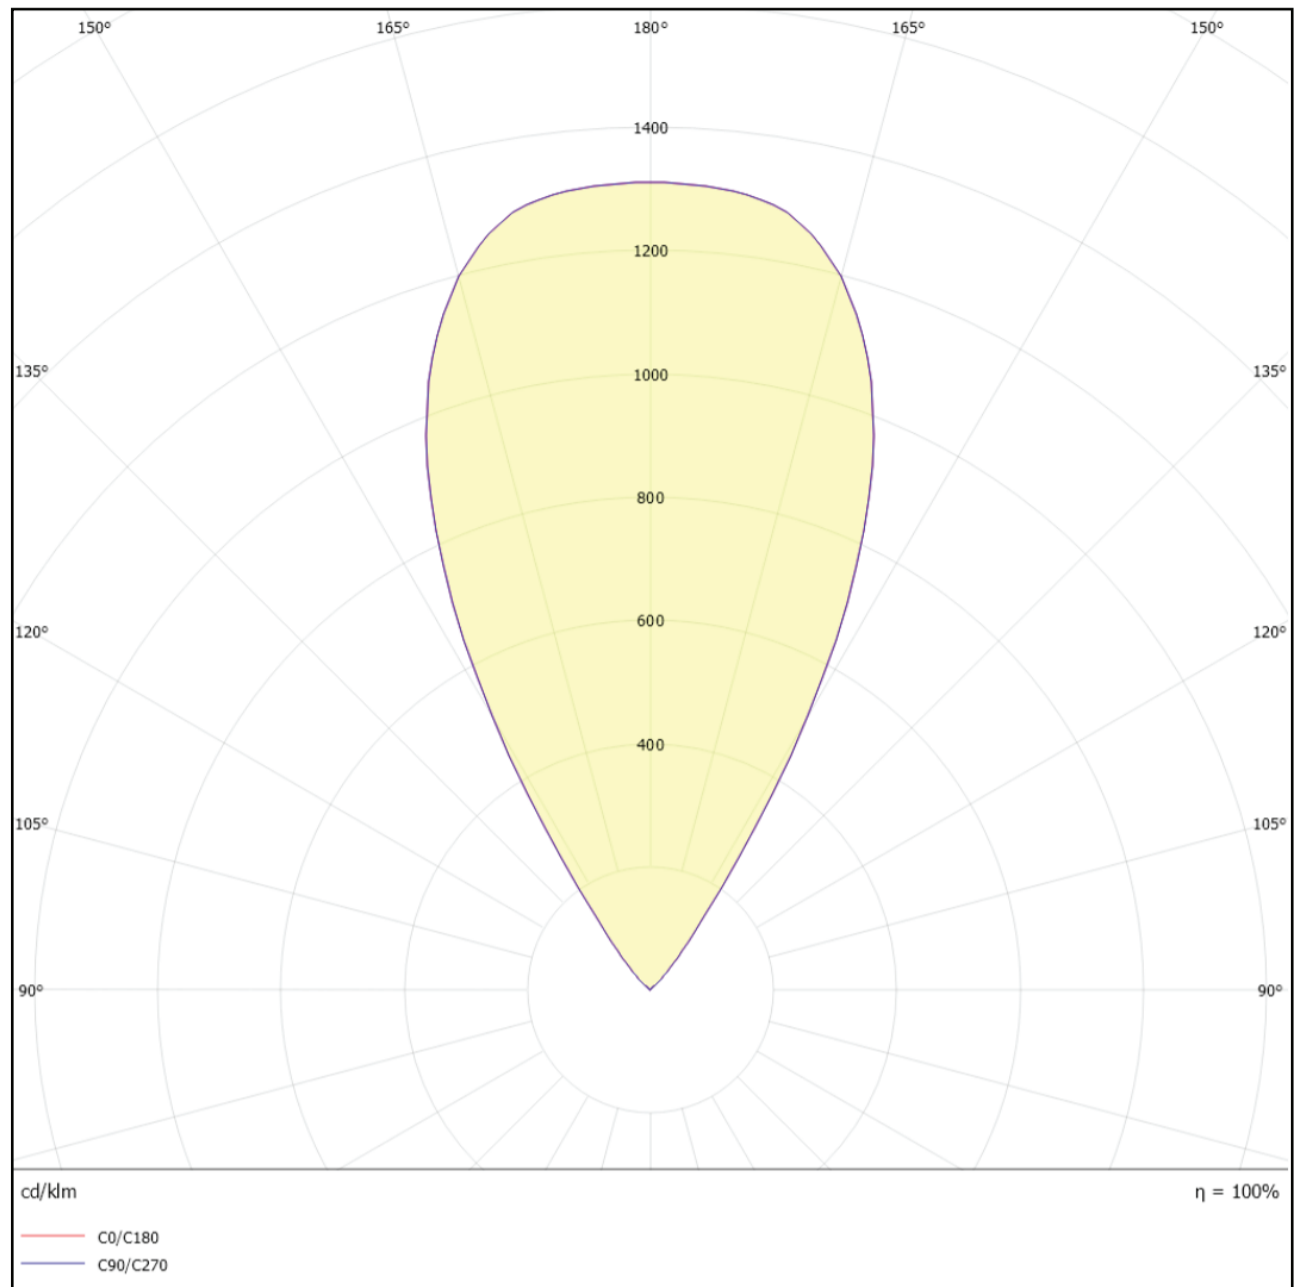

36 Watt 60° Beam Angle
Cone Diagram

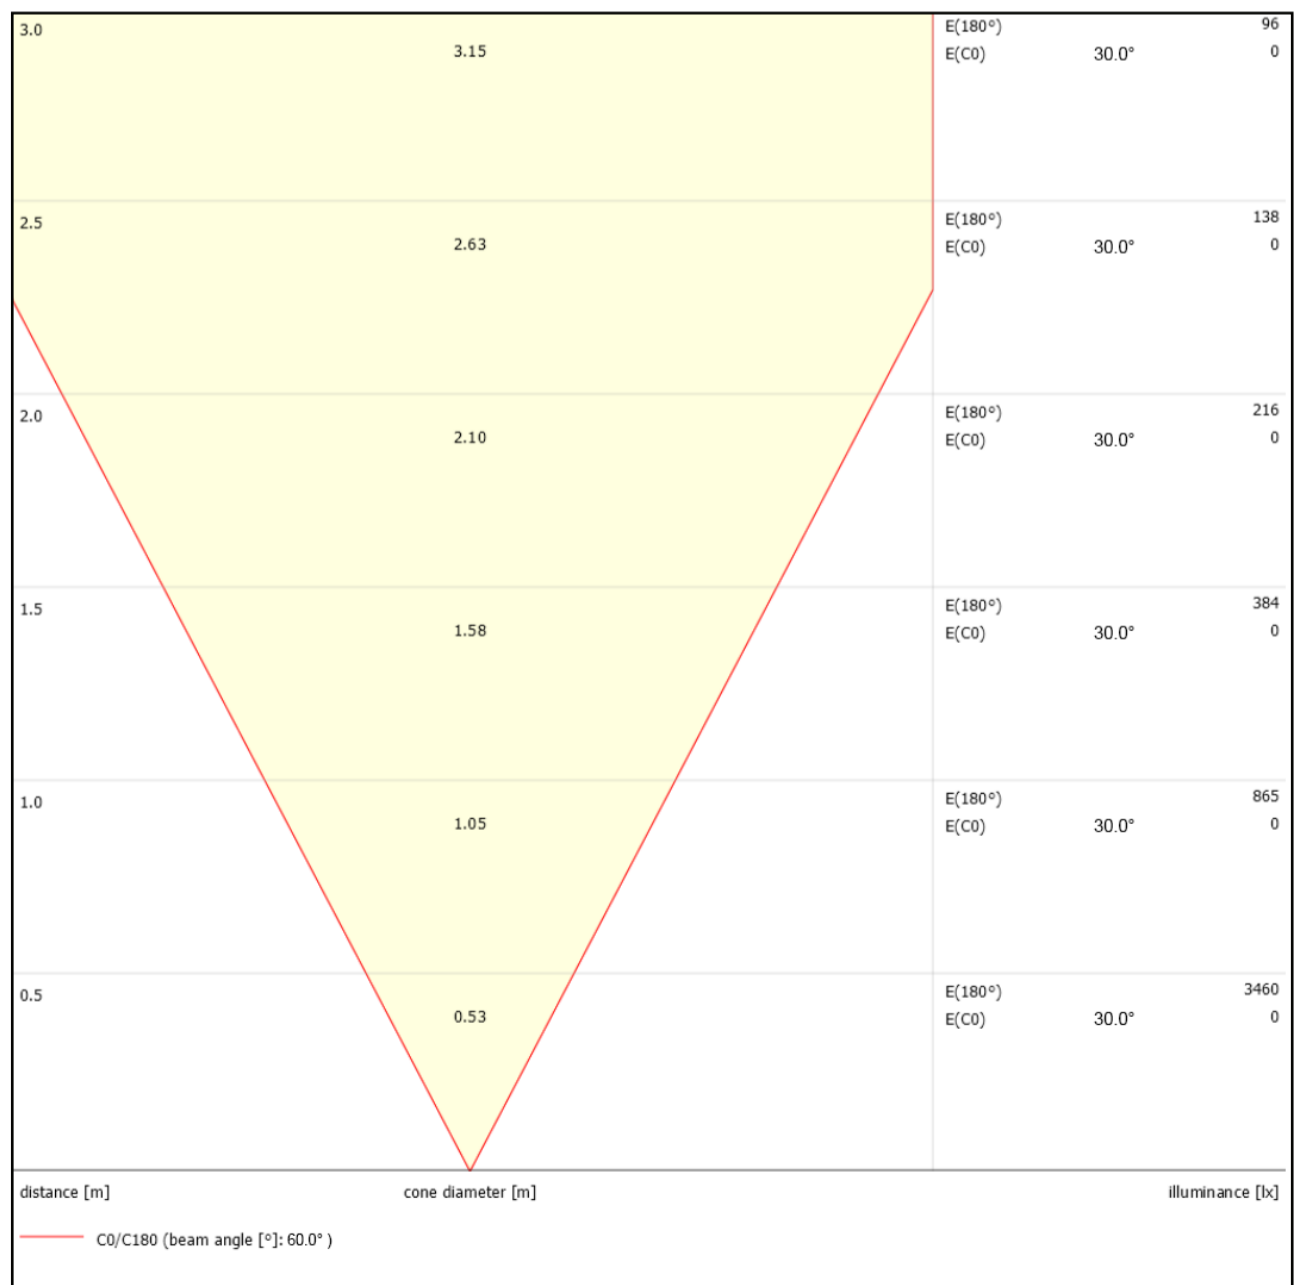



Vega VE

BRIGHTON



Vega VE

BRIGHTON