



Bianco-B

Lighting Panel

DESCRIPTION



Suitable for a wide range of applications, Bianco is a backlit, edge lit, and reduced-glare luminaire that delivers uniform and controlled light. With its PMMA diffuser, it can provide a totally innovative way to light up spaces. It is ideal for general areas while maintaining a family visual throughout the building.



Driver



LED Chip



Illumination Data

Colour temperature	3000K 4000K 5000K 6500K
Lumen output	3150LM 3800LM 4200LM 4410LM
CRI	80 90
Beam angle	120° Flood
UGR	<13

Physical Specification

Material finish	Aluminium
Diffuser	Poly carbonate
Optics	PMMA LENS
Ingress protection (IP)	20 40 54 65
Impact protection (IK)	02

Electric Characteristics

Light source LED	LED Built in
Type Power	SMD
P.F	30 36 40 42 Watt
	>0.9

Installation

Installation	Ceiling Recessed Suspended
	Surface mounted
Wiring	Product complete with electronic components

Luminaire Body Finish

White RAL 9003



Certificate & Warranty


Certification	CB CE LM79 LM80
	TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	5 years



Bianco-B

Lighting Panel

Dimensions & Specs

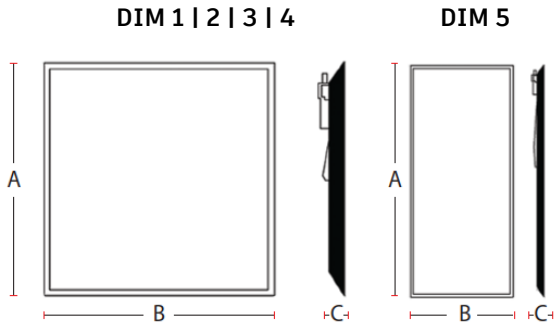

Dimensions of luminaires

Dim	A	B	C
1	595/620	595/620	30
2	595/620	595/620	36
3	595/620	595/620	40
4	595/620	595/620	42
5	1195	295	30


* All dimensions in this schedule table are in millimeters*

Specs

Dimensions (mm)	Wattage (W)	lumen (lm)
Dim1	30 watt	3150lm
Dim2	36 watt	3800lm
Dim3	40 watt	4200lm
Dim4	42 watt	4410lm
Dim5	40watt	4200lm

Product coding system

BR - BB X X XX.X XX F XX W - X

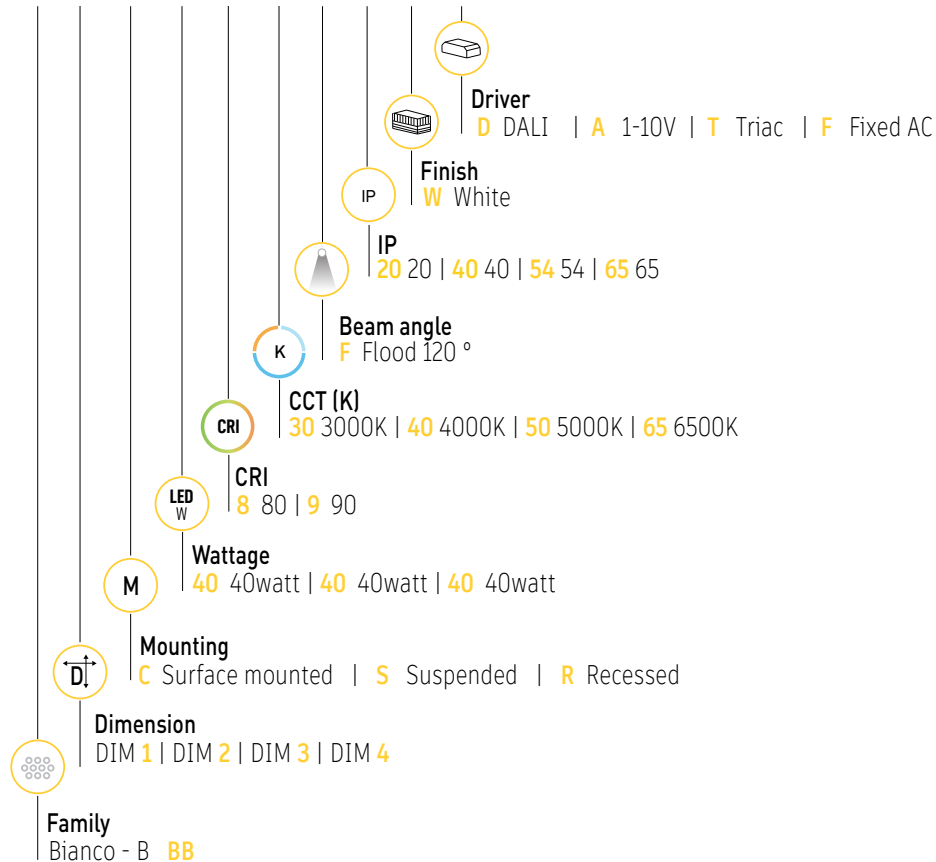

BR - BB X X XX.X XX F XX W - X

Configure luminaire specs & send us the code for order confirmation



Bianco-B

Lighting Panel

Optional Application



Battery



Dimmable


Brighton luminaires Map

■ Brighton Luminaires Range

■ Selected Luminaire Default Placement

Indoor


Outdoor

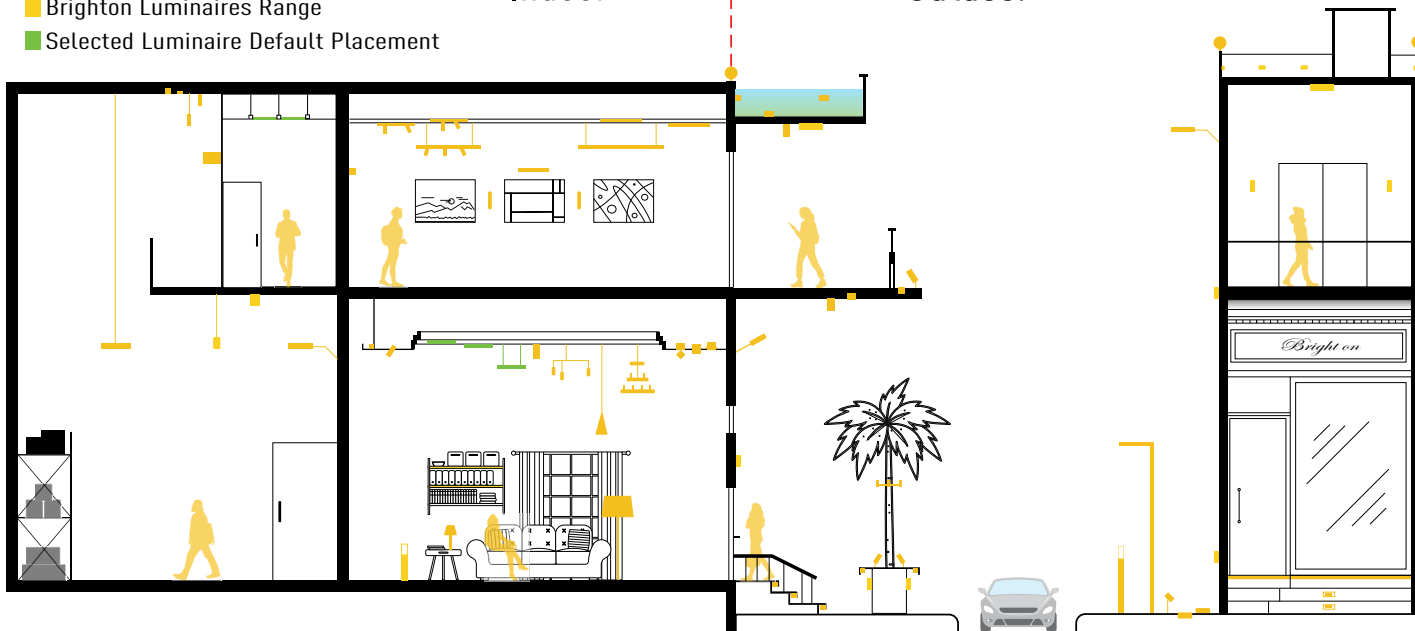

Accessories




01. Suspension Kit



02. Surface Kit

Beam Angle Polar Curve





Bianco B

BRIGHTON

