

Scope X

Projector & Spikes



DESCRIPTION

Have high-performing spot adjustable surface mounted projector.
IP 66 protection degree.
Applications : Landscape and facade lighting.



Driver



LED Chip



Illumination Data

Color temperature:	3000K 4000K 6500K
Lumen output:	646 LM 1763LM
CRI	80
Beam angle	15° 24° 38° 60°

Physical Specification

Material Finish	Die cast aluminium
Diffuser	Tempered Glass
Optics	LENS
Ingress protection (IP)	66
Impact Protection (IK)	08

Electric Characteristics

Light source LED	LED Built in
type Power	COB
P.F	6 Watt 16 Watt
	>0.9

Installation


Installation	Ground Surface
Wiring	Product complete with electronic components

Luminaire Body Finish Color

White Ral 9003	
Grey Ral 9006	
Black Ral 9005	

Certificate & Warranty


Certification	CB CE LM79 LM80 TM21 Photo biological
Lifetime expectancy	50.000 hrs
Warranty duration	Up to 5 years



Scope X

Projector & Spikes

Dimensions & Specs

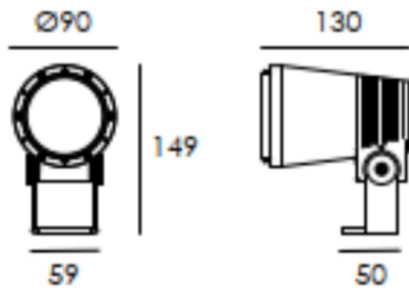

All dimensions in these sketches are in millimeters


Dimensions & specs of luminaires

Dim	Diameter	Height	Watt	Lumen
1	70mm	104mm	6	646
2	90mm	130mm	16	1763

All dimensions in this schedule table are in millimeters


Product coding system

BR - SCX X X XX.8 XX X 66 X - X

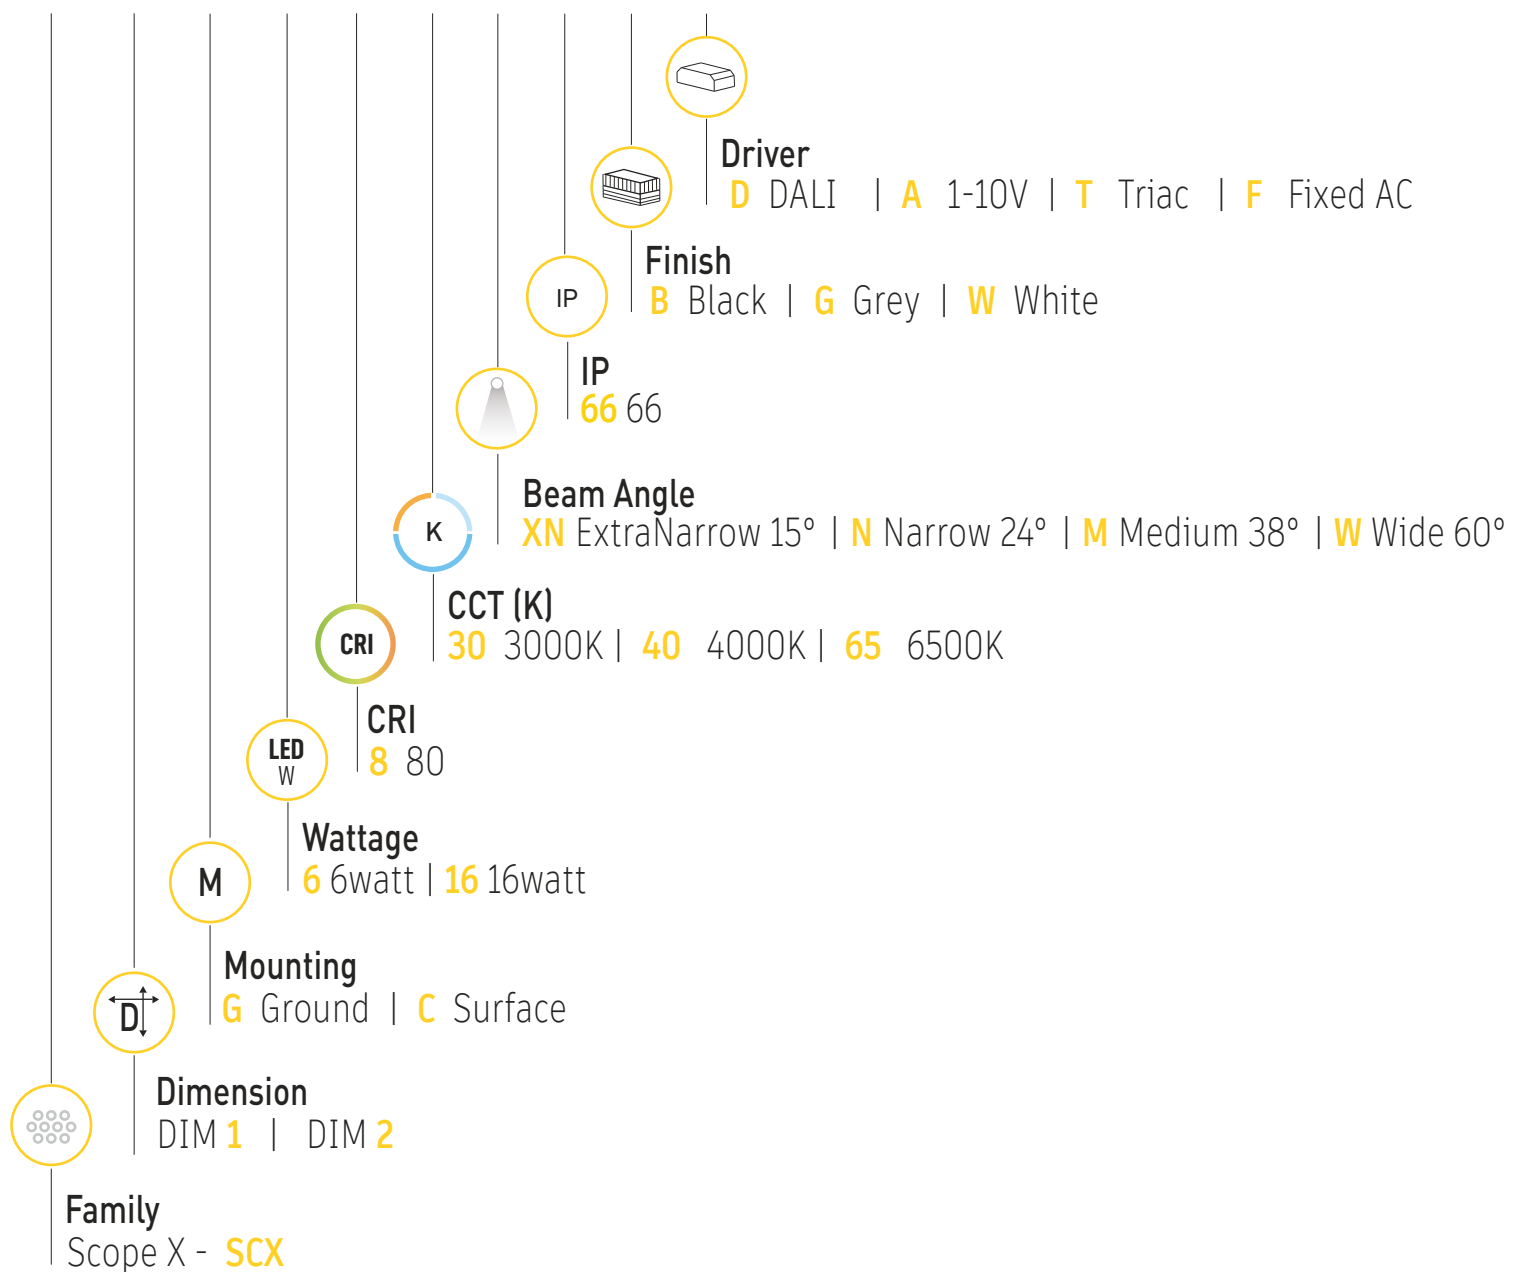

BR - SC X X XX.8 XX X 66 X - X

Configure luminaire specs & send us the code for order confirmation



Scope X

Projector & Spikes

Optional Application



RGB




Dimmable

Brighton Luminaires Map

- Brighton Luminaires Range
- Selected Luminaire Default placement

Indoor

Outdoor




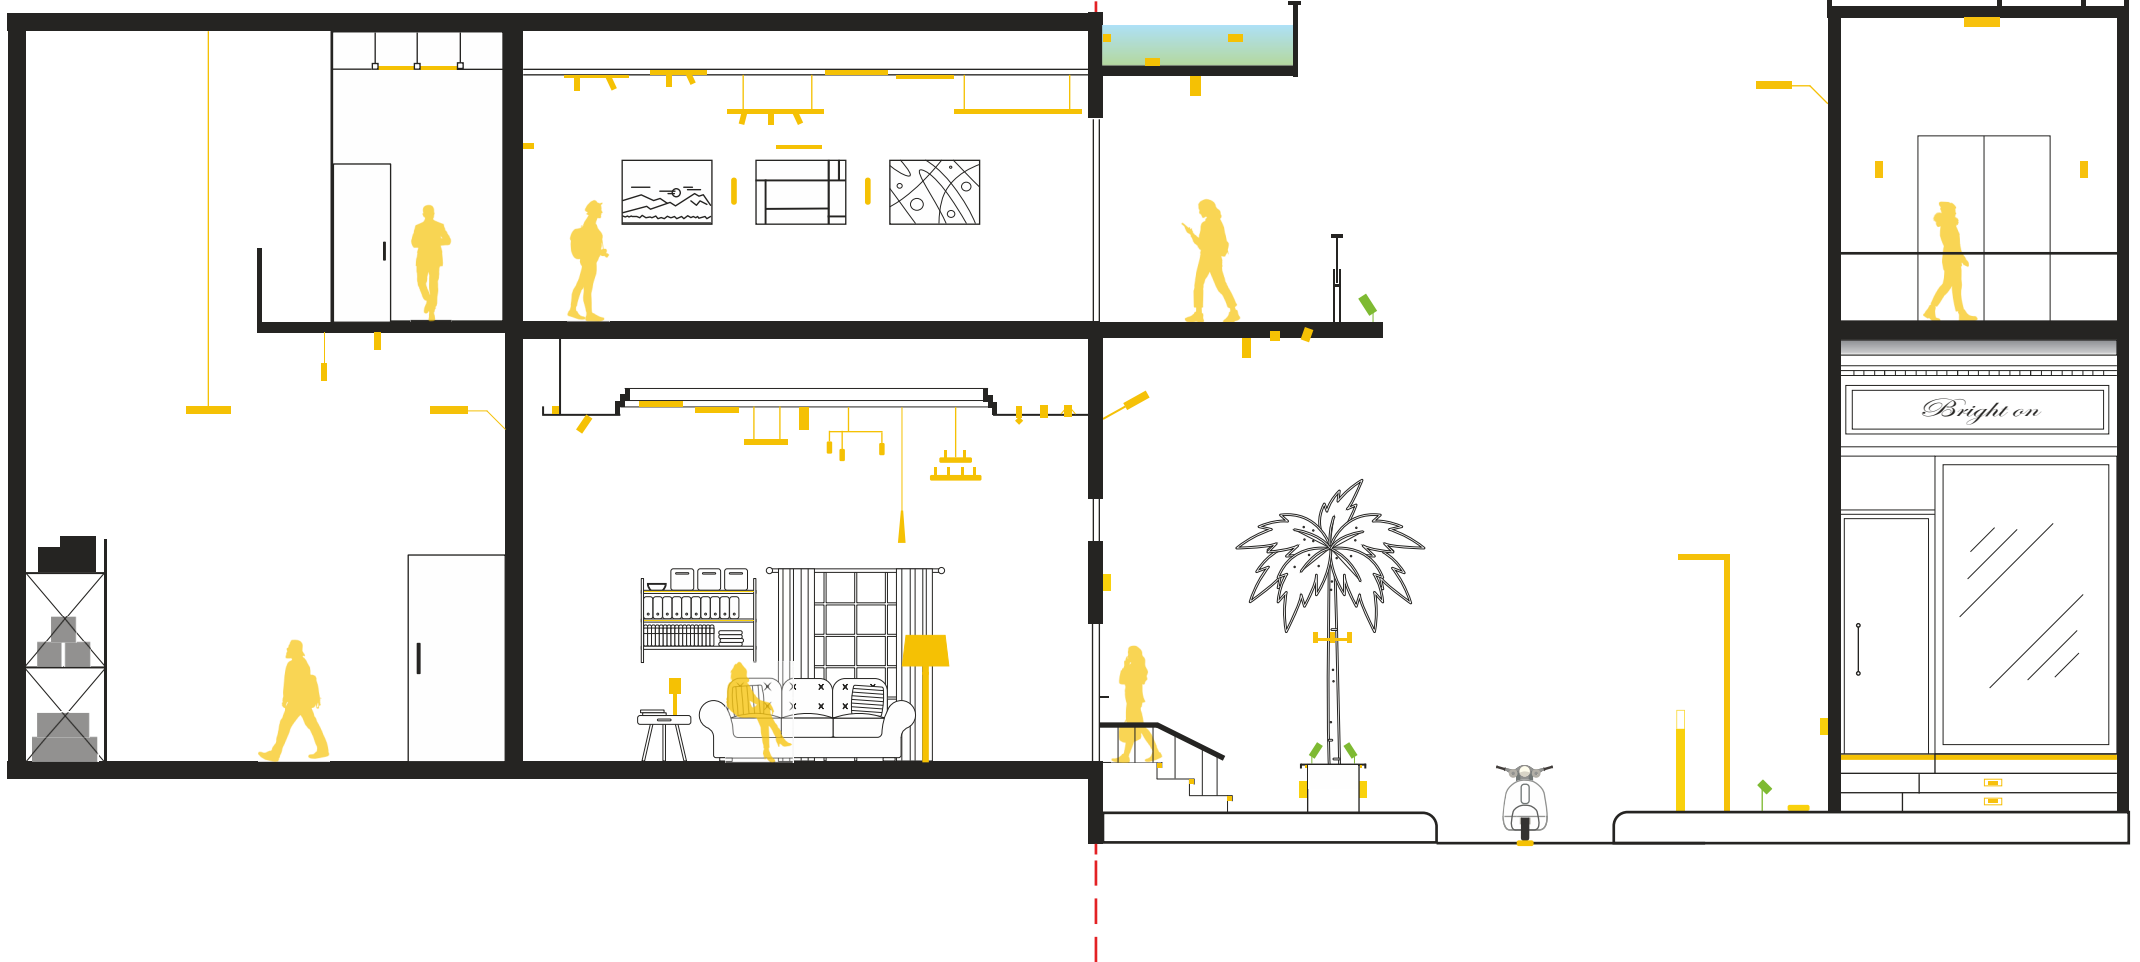


Accessories



01. Spike for garden application

Beam Angle

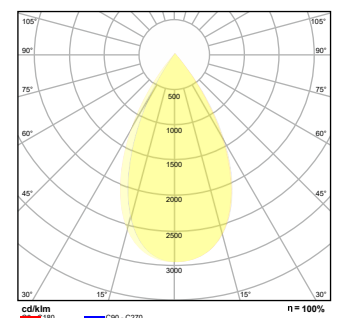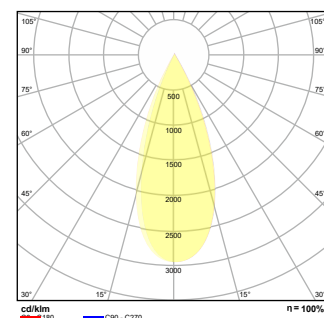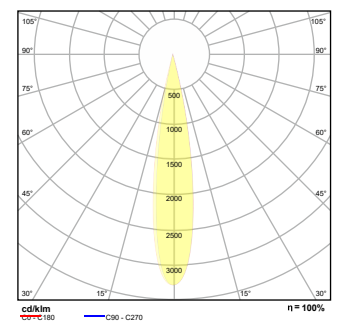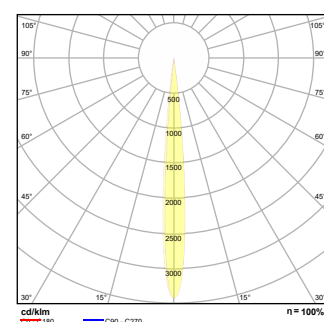

Scope X

BRIGHTON

